

ISBN: 978-81-939399-1-8

CONFERENCE PROCEEDINGS
ABSTRACTS
ICSGT 2018
STATE POLYTECHNIC OF MALANG

Malang, 27 August, 2018

Organized by:



In Association with:



ORGANIZING COMMITTEE INTERNATIONAL CONFERENCE ON SMART GREEN TECHNOLOGY (ICSGT) 2018

Director	: Drs. Awan Setiawan, M MT, MM
Advisors	: Supriatna Adhisuwignyo, ST, MT Drs. Halid Hasan, MStratHRM Dr. Eng. Anggit Murdani, ST, M.Eng. Dr. Luchis Rubianto, LRSC, MMT
Conference Chair	: Dr. Ir. Bambang Sugiyono Agus Purwono, M Sc
Vice Conference Chair	: Drs. Masroni, MM
Conference Secretary	: Dr. Drs. Nur Salam, M Pd Drs. Rahbini, MT
Treasurers	: Frinta Pratamasari, SE Feronika Wijayanti, MM
Members	: Dr. Wirawan, B Eng (HONS), MT Dr. Moechammad Sarosa, Dipl. Ing. MT Dr. Ratih Indri Hapsari, ST, MT, Ph D Dr. Achmad Zaini, SE, MM Dr. Hilda Cahyani, SS, MPd, Ph D Dr. Drs. Mohammad Maskan, MSi Erfan Rohadi, ST, MEng, PhD Indrazno Siradjuddin, ST, MT, Ph D
Editors	: Supriatna Adhisuwignyo, ST, MT Drs. Masroni, MM Dr. Luchis Rubianto, LRSC, MMT Dr. Ir. Bambang Sugiyono Agus Purwono, M Sc



PREFACE
CONFERENCE CHAIR OF ICSGT 2018
STATE POLYTECHNIC OF MALANG

It is a big pleasure to me on behalf of the Organizing Committee of a two-day International Conference of Smart Green Technology (ICSGT) to welcome all the delegates and participants of this conference held in Malang city – the flower city.

As stated in the title, the scope of the conference covers about developing technologies for the smart living, which in fact, requires many disciplines that constitute engineering as a whole and united field.

We are whole-heartedly knowledgeable that differs from academic fields and industry professionals, this conference may also give opportunities to undergraduate and post graduate students and research scholars alike to take an active part and present research papers.

By doing so, they will not only gain greater insight into their discipline, but also contribute to the existing body of knowledge in that domain.

I am certain that the conference will prove to be a healthy point of academic interaction and so the students and faculty members as well will not only give but also benefit and draw inspiration from the talks and presentations from the distinguished guests.

Malang, August 27, 2018

Bambang Sugiyono Agus Purwono



FOREWORD

DIRECTOR OF STATE POLYTECHNIC OF MALANG

It is our great pleasure to welcome all participants, guests, keynote speakers, and presenters at this conference which is organized by the State Polytechnic of Malang.

The International Conference of Smart Green Technology 2018 (ICSGT 2018) provides a setting for discussing recent developments in a wide variety of topics of green technologies.

The conference particularly encouraged the interaction of research students and scholars with the more established academic community to present and to discuss new and current works. I believe that this conference will be a momentum to stimulate further study and research in all topics related to the green technology developments.

I would like to express my deep appreciation to keynote speakers for the efforts to present the ideas and methods in a lively and accessible way.

I would like to thank those who have responded to our call to take part and to contribute to this conference. We have a big hope that all of you enjoy, and get more knowledge and fruitful experience through the conference.

Finally, but not least, support and efforts from the conference organizing committee were absolutely essential to this conference. Therefore, I would like to acknowledge my sincere thanks to the conference organizing committee.

Malang, August 27, 2018

Awan Setiawan

TABLE OF CONTENT

Title	Page
Cover	i
Organizing committee	ii
Preface	iii
Foreword	iv
Table of Content	v
Appendix	100

Keynote speakers

Title	Page
[ABS-4] Welding Characteristics of Titanium Alloys <i>Tim Pasang, Mana Aziziderouei, Yuan Tao</i>	1.
[ABS-11] Innovative Approaches to Marine Antifouling <i>Vesna Lavtizara, Hideo Okamurab</i>	2.
[ABS-53] Zinc Ferrite-Based Nanocomposites and Their Photocatalytic Applications <i>Marjorie Lara Baynosa, Amr Hussein Mady, and Jae-Jin Shim</i>	3.
[ABS-47] Nano-enabled Membranes Technology: The Way Forward for Sustainable Water Treatment Solution <i>Ahmad Fauzi Ismail</i>	4.
[ABS-99] Elastic WLAN System - Challenge for Energy-Saving and High-Performance Wireless Networks <i>Nobuo Funabiki</i>	5.

Invited Speakers

Title	Page
[ABS-2] Effect of Heat Treatment on Drillability of Titanium Alloy 6Al-2Sn-4Zr-6Mo <i>Mahros Darsin, Timotius Pasang, Zhan Chen</i>	6.
[ABS-7] Analysis Stress and Displacement Cement Composites of 3-Axial Force Effect on Turning Process Alumunium 6061 <i>Santoso Mulyadi, Triwahju Hardianto, Yuni Hermawan, Dwi Djumhariyanto, Robertus Sidartawan</i>	7.
[ABS-9] Development of Slope Handling Guidelines in Arjasa, Jember Regency <i>Rahman Anda, Farid Makruf</i>	8.
[ABS-16] Maintenance of Centrifugal Pump with Reliability, Availably, Maintainability and Safety (RAMS) Method and Simulating Operating Characteristic Curve <i>Tri Suharno, Bambang Sugiyono Agus Purwono</i>	9.
[ABS-22] Optimization of Hybrid Powered Refrigerator System (Solar Cell Plus Diesel Engine) for Traditional Fishing Vessels in Makassar. <i>Soetyono Iskandar, Moch. Bruri Triyono, Nurlaela Latief, A. Muh. Idkhan</i>	10.
[ABS-28] Effect Frequency Ultrasonic Vibration on Double Pipe Heat Exchanger at Cooling Process <i>Sudarmadji, Bambang Sugiyono Agus Purwono, Santoso</i>	11.
ABS-29] Analysis and Design of Bus Chair for Economic Class Using Ergonomic Function Deployment (EFD) Method <i>Robertoes Koekoeh Koentjoro Wibowo, Siswoyo Soekarno, Ahmad Syuhri, Dwi Devi Vayendra</i>	12.
[ABS-32] Monitoring System and Control of Electric Vehicle of Jember University Based on Radio Frequency <i>Bambang Sujanarko, Fajar Kurniawan, Moch. Hasan, Widyono Hadi, Samsul Arifin, Devita Ayu Larasati, Nita Kuswardhani</i>	13.
[ABS-36] Object Tracking on Semi-Automatic Surveillance Camera Using Image Processing Based on Mean-Shift Method <i>Catur Suko Sarwono , Faiq Aprilian Romzi, Khairul Anam, Bambang Sujanarko</i>	14.
[ABS-37] Analysis of Power Transformer Conditions Using Adaptive Neuro Fuzzy Inference System Based on Dissolved Gas Analysis Method <i>R. B. Moch. Gozali, Bambang Sujanarko</i>	15.

Title	Page
[ABS-114] Chlorophyll Photosensitizer of Pterocarpus Indicus for Photodynamic Inactivation <i>Basitha Febrinda Hidayatulail, Rahman Arifuddin, Dwi Arman Prasetya, Anggraini Puspita Sari</i>	75.
[ABS-115] Open Source Network Site Elgg Based Learning Innovation at the Community College Semen Indonesian <i>Kholid, Totok Mulyono</i>	76.
[ABS-13] Implementation of The Entrepreneurship Learning Model Based on Business Projects for the Development of the Technopreneurship Spirit Among Students of the State Polytechnic of Malang <i>Mohammad Maskan, Ita Rifiani Permatasari</i>	77.
[ABS-100] The Green Marketing Strategy and Its Impact on Customers Satisfaction <i>Ludfi Djajanto, Awan Setiawan, Tundung Subali Patma, Surpriatna Adhisuwigno, Hanif Mauludin</i>	78.
[ABS-25] Implementation Green Technology for Water Treatment Plant in Paper Small Scale Industry <i>Rendi Rainardi, Bambang Sugiyono Agus Purwono, Ida Bagus Suardika</i>	79.
[ABS-27] Pilot Plant of Water Treatment Unit for Flood Water becomes Clean Water with Pneumatic Flash Mix <i>Fahir Hassan, Yeny Dhokhikah, Rusdiana Setyaningtyas</i>	80.
[ABS-95] System Design and Analysis of Nozzle Aerator Effect On Water Treatment Plant Water-Based Industry <i>Supriatna Adhisuwigno, Masroni, Bambang Sugiyono Agus Purwono, Rendi Rainardi</i>	81.
[ABS-87] The Effect of Organizational Support Toward Organizational Pride Along with the Implications on Organizational Citizenship Behavior <i>Nilawati Fiernaningsih, Pudji Herijanto</i>	82.
[ABS-93] The Impact of Organizational Culture on Organizational Learning and Organizational Performance <i>Halid Hasan, Farika Nikmah, Erlangga Andi Sukma, Rizky Kurniawan Murtiyanto</i>	83.
[ABS-107] Web-Based Accounting: Learning in Making Financial Statements for Students <i>Chitra Santi</i>	84.

Title	Page
[ABS-92] Referential and Attributive Using Found in English-Indonesian Technological Terms of Urban Living <i>Elsha Astika Ayu</i>	96.
[ABS-106] Integration of Character Education in Developing English Syllabus and Lesson Plan of Vocational Education <i>Jozua F. Palandi, Zusana E. Pudyastuti</i>	97.
[ABS-48] A Conceptual Design of Water Conservation System for Residential Housing <i>Yeny Dhokhikah, Yuliana Sukarmawati, Haris Faturrahman, Rizqy Dhinia, Al Adilah</i>	98.
[ABS-109] Innovation of Visual and Simulation Based-Teaching Technology to Increase The Effectiveness and Efficiency of Financial Accounting Learning Processes <i>Endah Suwarni, Bambang Budiprayitno, Ahmad Jarnusi</i>	99.
Comparison of Zeolite, Alginate, Polyurethane Foam as Carries For Lipase Mucor miehei Immobilization to Bio-Ester Production <i>Dwina Moentamaria, H Nurmahdi, C Sindhuwati, H Dewajani and A Chumaidi</i>	100.

[ABS-27]

Pilot Plant of Water Treatment Unit for Flood Water becomes Clean Water with Pneumatic Flash Mix

Fahir Hassan, Yeny Dhokhikah, Rusdiana Setyaningtyas

Universitas Jember
Universitas Muhammadiyah Jember

Abstract

Water is primary need for human beings in any condition such as in disaster condition. More specifically in floods where water condition is abundant but cannot be consumed because it does not comply the existing quality standards. This pilot plant is based on the condition where the location of flood is quite difficult to be accessed and the energy resources are limited. In principle, this water treatment unit in the future is only intended to treat flood water. The process that occurs in this reactor was the coagulation and flocculation process which were done by batch system. Flash mix process using a pneumatic system and slow mix process using pedals were applied in this reactor. All process was done without involving the electrical energy, this was due to limited access to disaster conditions. At this stage, this pilot plant was proved to be effective for decreasing TDS and turbidity in flood water. The turbidity parameter showed the quality of raw water was 14.5 NTU and the treated water turbidity value was 6.51 NTU. Thus, the percentage of removal for turbidity parameter was 55,1%. The decline of turbidity affects the decrease of TDS value. The value of TDS in raw water was 135 mg/L while in the treated water was 1.27 mg/L. As a result, the percentage of TDS removal was 99.06%.

Keywords: Water Treatment disaster Flood

Topic: Water Treatment Plants

Pilot Plant of Water Treatment Unit for Flood Water becomes Clean Water with Pneumatic Flash Mix

Fahir Hassan^{1*}, Yeny Dhokhikah¹, Rusdiana Setyaningtyas²

¹Environmental Engineering Study Program, University of Jember, Kalimantan Road No. 37, Indonesia

²Civil engineering study program, Muhammadiyah University of Jember, Karimata Road No. 49, Indonesia

*fahirhassan@unej.ac.id:

Abstract

Water is primary needs for human beings in any condition such as in disaster condition. More specifically in floods where water condition is abundant but cannot be consumed because it does not comply the existing quality standards. This pilot plant is based on the condition where the location of flood is quite difficult to be accessed and the energy resources are limited. In principle, this water treatment unit in the future is only intended to treat flood water. The process that occurs in this reactor was the coagulation and flocculation process which were done by batch system. Flash mix process using a pneumatic system and slow mix process using pedals were applied in this reactor. All process was done without involving the electrical energy, this was due to limited access to disaster conditions. At this stage, this pilot plant was proved to be effective for decreasing TDS and turbidity in flood water. The turbidity parameter showed the quality of raw water was 14.5 NTU and the treated water turbidity value was 6.51 NTU. Thus, the percentage of removal for turbidity parameter was 55,1%. The decline of turbidity affects the decrease of TDS value. The value of TDS in raw water was 135 mg / l while in the treated water was 1.27 mg / l. As a result, the percentage of TDS removal was 99.06%.

Keywords: Disaster; Floods; Water

1. Introduction

Water is the main resource needed in life. None of the living things in the world can survive without water. This water requirement is undeniably still needed in certain conditions, namely natural disasters [2]. There are current issues related to climate change that cause unpredictable changes in rainfall and increased development in Indonesia which causes a decrease in the environmental carrying capacity of hydrometeorological disasters such as putting believers, landslides, and flooding is a disaster that dominates. Based on national disaster management data (BNPB) in 2015, hydrometeorological disasters dominated up to 95% of the total disasters in 2015 totaling 1,681 incidents. Of the total 492 incidents that have been flooded, this indicates that floods reached 29% of the total national disasters that occurred in 2015. [4].

Provision of clean water needs in flood conditions becomes a problem that needs to be addressed. The provision of clean water in flood conditions is generally carried out using tank cars that have limitations in their use. Currently flood water treatment using membranes has begun to be developed but the use of membranes requires relatively greater energy, the cost of procurement is more expensive and goprasian which requires special expertise [1].

2. Theoretical background

This section discusses the basics used in this study

2.1. Water Conditions during Floods

Flooding, which is one of the hydrometeorological disasters, is a condition in which environmental conditions do not have sufficient carrying capacity due to the high rate of development and poor governance planning. Floods which are generally a flow of water above the surface of the soil cause suspended solids as the main principal of significant pollutants. [7]. In terms of quality, research has been carried out using a test pond filled with raw water and compared between conditions before rain and conditions after rain. In terms of the TDS parameter, there has been a doubling of increase. So for other chemical parameters such as calcium, magnesium, and nitrate, the increase has doubled [5].

2.2. Drinking Water Quality

Drinking water quality refers to RI Minister of Health Regulation No. 492 / MENKES / PER / IV / 2010 in article 3 number 1 states that drinking water that is safe for health must meet physical, microbiological, chemical and radioactive requirements contained in mandatory parameters and additional parameters [6]. In this study the tests carried out on the final product are the physical and chemical mandatory parameters listed in Table 1. For additional parameters to be used in accordance with the conditions of the regional environmental quality. If there are parameters that exceed the water produced is not including drinking water and must go through the processing process.

Table 1: Mandatory Drinking Water Quality Parameters

No	Parameter	Unit	Max Level
Parameters that relate directly to health			
a. Microbiological parameters			
1) E. Coli	Amount per 100 ml sample		0
2) Total Coliform Bacteria	Amount per 100 ml sample		0
b. An-organic			
1) Arsenic	mg/L		0,01
2) Fluoride	mg/L		1,5
3) Total Chromium	mg/L		0,05
4) Cadmium	mg/L		0,003
5) Nitrite, (as NO ₂ -)	mg/L		3
6) Nitrate, (as NO ₃ -)	mg/L		50
7) Cyanide	mg/L		0,07
8) Selenium	mg/L		0,01
Parameters that are not directly related to health			
a. Physical parameters			
1) Odor			-
2) Color	TCU		15
3) Total Dissolved Solids (TDS)	mg/L		500
4) Turbidity	NTU		5
5) Taste			-
6) Temperature	°C		± 30
b. Chemical Parameters			
2) 1) Aluminium	mg/L		0,2
2) Iron	mg/L		0,3
3) Adequacy	mg/L		500
4) Chloride	mg/L		250
5) Manganese	mg/L		0,4
6) pH	mg/L		6,5-8,5
7) Zinc	mg/L		3
8) Sulfate	mg/L		250
9) Copper	mg/L		2
10) Ammonia	mg/L		1,5

2.3. Flash Mix

Flash mixing in water treatment is to produce water turbulence. In general, fast stirring is stirring carried out on large speed gradients (300 to 1000 seconds⁻¹) for 5 to 60 seconds or GTd (Camp Numbers) ranging from 300 to 1700. Specifically the G and TD values depend on the purpose or target of fast stirring [8].

2.4. Pneumatic stirring

Pneumatic stirring is stirring that uses bubble-shaped air (gas) as a stirring force. The bubble is put into the water and will cause movement in the water. Injection of pressurized air in water with a large bubble will cause turbulence in the water. The air flow used for fast stirring must have a large enough pressure to be able to suppress and move the water. The greater the air pressure, the greater the speed of air bubbles produced and the greater turbulence obtained [8]. At pneumatic stirring, the power generated is a function of the air flow injected which can be written as follows:

$$P=3904.Ga.Log[(h+10,4)/10,4]$$

With : P = Power, (N.M/s)


Ga = air discharge, m³/ minute

H = diffuser depth

3. Research Methods

The materials that will be used in this research are alum as coagulant and river water as raw material for replacing flood water. The tools used are reactors (150-liter drums), Manual Wind Pumps, modified wind pumps, measuring cups, stopwatches, 5-liter Jerigen thermometers, pH indicator paper, spectrophotometers.

3.1. Tool performance

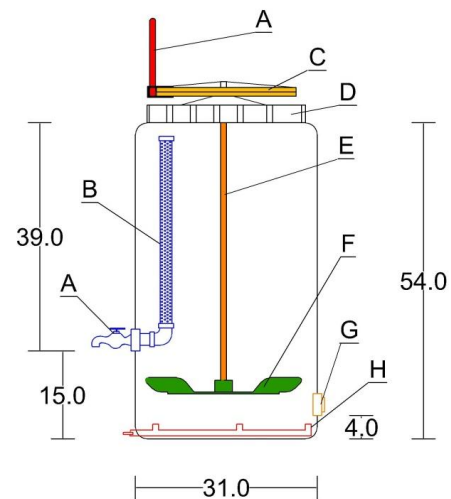**Fig. 1 :** Reactor

The reactor used as a prototype for flood water treatment uses pesticide used PET plastic material that has been through a cleaning process. In Figure 4.2 it can be seen that the height of the reactor is 54 cm with a width of 3.10 cm, this size is very easy to carry out tool mobilization and storage. The letter A in the reactor shows that the water treatment tap which previously flowed through the porous pipe is shown in point B. The use of porous pipes at point B is intended so that the water does not flow directly to the faucet hole so that it can increase the flow velocity and disturb the floc formed in the coagulation process of flocculation. The function of this porous pipe is also a simple screening place using dakron cloth media. In addition to inhibiting the drainage in the pipe, the dakron function is also a simple filtering process when there are flocks carried in the water flow that experience the sedimentation stage.

Components that play a role in the stirring process are air pipes (H points) and slow mixing fans (point F). Fast stirring with the aim of stirring the coagulant to be evenly done pneumatically or by using air bubbles. Turbulence of air bubbles formed is expected to be able to assist the stirring process. Furthermore, slow stirring is carried out which is assisted using a mixing fan with 10 fan leaves (point F). fan rotation is affected by the force pivoting on the C wheel at the top of the reactor. C wheel rotation is assisted by lever () which is then channeled to iron E. So that iron E is the energy transfer medium used.

Of course the whole process cannot be 100% processed. Processed water faucets located 15 cm high from the bottom of the reactor besides functioning to avoid collision of the fan, this distance of 15 cm is also the space provided for the sludge produced. Sedimentation / residual water is discharged through drain holes (point G).

In general, it can be concluded that the process that occurs in this reactor is fast stirring, slow stirring, sedimentation and rapid screening carried out in batch process. Where Batch process is a process that takes place alternately and sequentially in the same container, so the calculation of processing debit uses its own approach.



Fig. 2: Reactor operation

4. Results and Discussion

Analysis of detention time is intended to determine how much time is needed for the sedimentation process. In the batch processing system the water stays in one container and undergoes various processes in turn, the detention time is the time needed to process the water from the beginning to the end of the process. In the initial stage process that has been described in next section, there is a process of entering water, alum weighing, pneumatic stirring and slow stirring. These processes are carried out for 10 minutes with the details listed in Table 2

Table 2: Time for each process

NO	Process	Time Required (minutes)
1	Insert water through a rough filter	5
2	Consider and put alum	3
3	Pneumatic stirring	1
4	Slow mix	2
Total		11

In Table 2 it can be seen that the time needed to enter water into the reactor through the filter is done for 5 minutes. The process of entering using a 1 liter volume measuring cup. the use of a measuring cup is intended at the same time to calculate the total volume of the reactor. From the filling process for 5 minutes the reactor is fully charged with a volume of 57 liters.

The results of the sampling were then placed in a 330 ml plastic container as can be seen in Figure 3. Visually it can be seen that the longer the settling time is given the lower the turbidity level produced (more clearly). Test results can be seen in Table 4.



Fig. 3: Results of the turbidity level testing were carried out using a spectrophotometer with an NTU unit indicator

The results of the turbidity level testing were performed using a spectrophotometer with an NTU unit indicator. The results of the turbidity level testing were carried out using a spectrophotometer with an NTU unit indicator. Test results can be seen in Table 3.

In Table 3, the results of the analysis when graphed can be seen in Figure 4. In Figure 4 it can be clearly seen the length of time the sedimentation influences the existing NTU value. After being known the precipitation with the best NTU value is in sample

number 7, which is precipitation for 35 minutes. So that the total detention time in this reactor can be seen in Table 4.

Table 3: Level of turbidity of treatment with different sedimentation times

Sample No.	Sedimentation time (minutes)	Turbidity (NTU)
1	5	19,2
2	10	13,8
3	15	12,8
4	20	12,1
5	25	9,03
6	30	9,01
7	35	8,85

In Table 3, the results of the analysis when graphed can be seen in Figure 4. In Figure 4 it can be clearly seen the length of time the sedimentation influences the existing NTU value. After being known the precipitation with the best NTU value is in sample number 7, which is precipitation for 35 minutes. So that the total detention time in this reactor can be seen in Table 4, the results of the analysis when graphed can be seen in Figure 4. In Figure 4 it can clearly be seen the length of time the sedimentation influences the existing NTU value. After being known the precipitation with the best NTU value is in sample number 7, which is precipitation for 35 minutes. So that the total detention time in this reactor can be seen in Table 4.

Table 4: Total operational time

NO	Process	Time Required (minutes)
1	Insert water through a rough filter	5
2	Consider and include alum	3
3	Pneumatic stirring	1
4	Slow stirring	2
5	sedimentation	35
Total		46

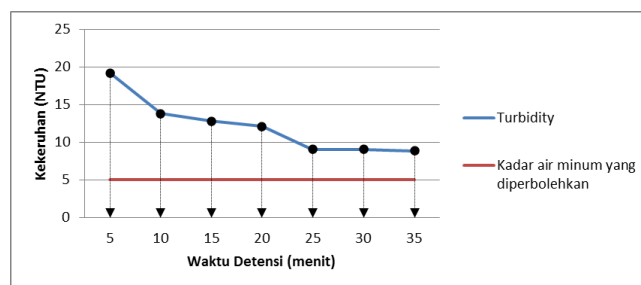


Fig. 4 : Relation between detention time and decrease in turbidity

4.1 Detention time and turbidity

The final sample that was used as a reference for the prototype performance was the result of 46 minutes detention time. After enough water is taken, then the water that can be used is calculated and the water that cannot be used (disposed of as sludge). Of the total 57 liters, the contents of the reactor 81.5% can be used as much as 46.7 liters. Whereas 18.5% which is as much as 10.5 liters is water that cannot be used and as a residue. So that the overall reactor discharge can be interpreted as 1.01 liters / minute.

4.2 Treatment results

The results of processing on this prototype as a whole have not been able to fulfill the requirements as drinking water. But the results of this study can provide some recommendations for further research that is better as the improvement of physical processing results can be seen in Figure 5.



Fig. 5: Comparison of Processed and Raw Water

The results of processing according to laboratory testing can be seen in Table 5. In Table 5 the tests carried out are physical and chemical aspects. For physical aspects, odor, taste, temperature, TDS, and DHL parameters have met. But for turbidity parameters (Tur-bidity) it still does not meet.

Table 5: Final Processing Results

Parameter	Unit	Method	Max Level	Raw Water	treated water
Physics					
Smell		Organo-leptic	none	none	none
Taste		Organo-leptic	none	none	none
Temperature	$^{\circ}\text{C}$		± 30	29,2	29,2
TDS	mg/l	Electrodialysis	500	135	1,27
Turbidity	NTU	Photometry	5	14,5	6,51
Electrical Conductivity	$\mu\text{mhos/cm}$	Electrodialysis		271	84
Chemical					
Iron	mg/l	Photometry	0,3	0,21	0,39
Chloride	mg/l	Titrimetric	250	10	30
Nitrite as NO ₂	mg/l	Photometry	3	0,07	0,07
Cupri (Cu)	mg/l	Photometry	2	0,2	0,16
Manganese	mg/l	Photometry	0,4	0,09	0,18
pH		Photometry	6,5-8,5	7,6	6,5

In this turbidity parameter, raw water has a turbidity value of 14.5 NTU and the treated water has a turbidity value of 6.51 NTU. So that it can be seen that the percentage of removal for turbidity parameters is 55.1%. The decline in turbidity affects the decline in the TDS value. TDS value in raw water is 135 mg / l while in processed products is 1.27 mg / l. so the percentage of TDS removal reached 99.06%. As for the chemical aspect, the iron parameters entered at the limit do not meet the quality standard.

5. Conclusion

Optimal detention time was carried out for 46 minutes with details, inserting 5 minutes water, 3 minutes alum weighing, 1 minute pneumatic stirring, 2 minutes slow stirring, and 35 minutes precipitation. The coagulant dose used in this process is 360 g, but the coagulant dose will change depending on the level of turbidity of the raw water. Removal process occurs in the parameters of turbidity and TDS with a turbidity percentage of 55.1% and TDS removal percentage of 99.06%.

Acknowledgement

This research was fully supported by funding from the University of Jember for beginner lecturers and publication funding by the Faculty of Engineering, University of Jember..

References

- [1] Cheremisinoff Nicholas P.(2002) "Handbook of Water and Wastewater Treatment Technologies" Butterworth-Heinemann. United States of America.
- [2] Bohlom, A., Prutzel, M. 2017 "Experts' understandings of drinking water risk management in a climate change scenario", Swedia, Climate Risk Management. Vol.16. Hal 133-144.
- [3] Hasan, M. 2016. "Rencana Induk Penelitian Universitas Jember Tahun 2016-2020", Universitas Jember, Jember
- [4] Nugroho, S.P. 2016. "Evaluasi Penanggulangan Bencana 2015 dan Prediksi Bencana 2016" Badan Nasional Penanggulangan Bencana, Jakarta.
- [5] Okoye, C. A., Ezenwaji, E.E., Awopeju, K. A. 2014. "The Impact of Urban Flooding on Surface Water Quality of Awka Town", Journal of Environmental Protection. Vol 5, 60-64 . Nigeria
- [6] Peraturan Menteri Kesehatan Nomor 492/MENKES/PER/IV/2010 Tentang Persyaratan Kualitas Air Minum.
- [7] Prodanof, J.H.A., Mascarenhas, F. C. B. 2010. "Urban Water Quality after Flooding", Federal University of Rio de Janeiro. Brazil
- [8] Qasim, S.R. Motley, E.M. and Guang, Z. (2000), "Water Works Engineering – Planning, Design, and Operation", Prentice-Hall. Upper Saddle River.

LIST OF PARTICIPANTS

No.	Code	Email	Presenter	Page
1	ABS-1	bambang.sugiyono@polinema.ac.id	Bambang Sugiyono AP	37
2	ABS-2	mahros.teknik@unej.ac.id	Mahros Darsin	6
3	ABS-3	ramli.thahir@polnes.ac.id	Ramli Thahir	38
4	ABS-4	tpasang@aut.ac.nz	Tim Pasang	1
5	ABS-5	kadeksuarjuna87@gmail.com	Satrio Binusa Suryadi	54
6	ABS-7	yunikaka@yahoo.co.id	Yuni Hermawan	7
7	ABS-8	hakimunim@gmail.com	Luthfi Hakim	39
8	ABS-9	rahmananda77@yahoo.com	Rahman Anda	8
9	ABS-11	vesna.lavtizar@gmail.com	Vesna Lavtizar	2
10	ABS-12	alifiulathin@ub.ac.id	Alifiulathin Utaminingsih	95
11	ABS-13	moh.maskan@polinema.ac.id	Mohammad Maskan	77
12	ABS-15	masurmahfudhi1996@gmail.com	Awan Setiawan	40
13	ABS-16	trisuharno33@gmail.com	Tri Suharno	9
14	ABS-18	alfansasongkog@gmail.com	Alfan Sasongko Gumilang	41
15	ABS-19	ifatoni01@gmail.com	Imam Agus Fatoni	42
16	ABS-20	hasan.bsr46@gmail.com	Hasan Basri Maulana F	43
17	ABS-21	miranti_crs@yahoo.co.id	Miranti Candrarisna Sunarso	55
18	ABS-22	soet_54mks@yahoo.com	Charles Soetyono Iskandar	10
19	ABS-23	bdour@hu.edu.jo	Ahmed Naeif Bdour	34
20	ABS-24	bambangsap2010@gmail.com	Richard Asante	56
21	ABS-25	rendirainardi@gmail.com	Rendi Rainardi	79
22	ABS-26	budiarsih@untag-sby.ac.id	Budiarsih	94
23	ABS-27	fahirhassan@unej.ac.id	Fahir Hassan	80
24	ABS-28	sudmaji@yahoo.co.id	Sudarmadji	11
25	ABS-29	koekoeh@unej.ac.id	Robertoes Koekoeh Koentjoro Wibowo	12
26	ABS-30	bbsujanarko@yahoo.co.id	Abdur Rohman	44
27	ABS-32	bbsujanarko@yahoo.co.id	Bambang Sujanarko	13
28	ABS-33	rmedyprink@yahoo.com	R Edy Purwanto	57
29	ABS-34	bambangsap2015@gmail.com	Tibangayuka Kabanda	58
30	ABS-36	bbsujanarko@yahoo.co.id	Catur Suko Sarwono	14
31	ABS-37	bbsujanarko@yahoo.co.id	Bambang Sujanarko	15
32	ABS-38	bbsujanarko@yahoo.co.id	Bayu Sovan P	45
33	ABS-39	bbsujanarko@yahoo.co.id	Novie Lukman Hamsa	46
34	ABS-40	bbsujanarko@yahoo.co.id	Muh. Zainal Roisul Amin	47
35	ABS-41	bbsujanarko@yahoo.co.id	Suprihadi Prasetyono	16
36	ABS-43	luchis_rubianto@yahoo.com	Luchis Rubianto	59
37	ABS-45	parastiwi@polinema.ac.id	Andriani Parastiwi	86
38	ABS-46	wellypras2014@gmail.com	Welly Prasetyo	48
39	ABS-47	bambang.sugiyono@polinema.ac.id	Ahmad Fauzi Ismail	4



CERTIFICATE

No. 160/SK/VIII/2018

Appreciated to:

Fahir Hassan for his/her worthy Oral Presentation titled
***"Pilot Plant of Water Treatment Unit for Flood Water becomes Clean Water
with Pneumatic Flash Mix"***
at International Conference on Smart Green Technology
on 27th – 28th August 2018 at The Santika Premiere Hotel, Malang, Indonesia



Drs. Awan Setiawan, MM
NIP. 19590910 198603 1 002



Dr. Ir. Bambang Sugiyono AP, M Sc
NIP. 19540305 198503 1 001

Organized by:



In Association with:



BioLEAGUES[®]
Integrating Medicine... Accelerating Research 2021

