

LEMBAR
HASILPENILAIAN SEJAWAT SEBIDANG ATAU PEER REVIEW
KARYA ILMIAH : PROSIDING INTERNASIONAL

Judul Makalah : Determination of correction value curve number (cn) on river floods with form factor > 8 using hec hms model applications

Penulis Makalah : Nanang Saiful Rizal, Kus Farukah


Identitas Makalah : a. Judul Prosiding : Proceeding of International Conference on Green Technology
 b. ISSN : 2580-7080
 c. Tahun Terbit : 1 Oktober 2017
 d. Penerbit : Fakultas Sains dan Teknologi UIN Malang
 e. Jumlah Halaman : 228

Kategori Publikasi Makalah *Prosiding Forum Ilmiah Internasional*
 Prosiding Forum Ilmiah Nasional

Hasil Penilaian *Peer Review* :

Komponen yang Dinilai	Nilai Maksimal <i>Prosiding</i>		Nilai Akhir Yang Diperoleh
	Internasional <input checked="" type="checkbox"/>	Nasional <input type="checkbox"/>	
a. Kelengkapan unsur isi buku (10%)	10		10
b. Ruang lingkup dan kedalaman pembahasan (30%)	29		29
c. Kecukupan dan kemutakhiran data/informasi dan metodologi (30%)	28		28
d. Kelengkapan unsur dan kualitas (30%)	28		28
Total = (100%)	95		95 x 2

Jember, 14 September 2018
 Reviewer 1



Dr. Gusfan Halik, ST., MT.
 19710804 199803 002
 Unit kerja : FT Universitas Jember

8,55

LEMBAR
HASILPENILAIAN SEJAWAT SEBIDANG ATAU PEER REVIEW
KARYA ILMIAH : PROSIDING INTERNASIONAL

Judul Makalah : Determination of correction value curve number (cn) on river floods with form factor > 8 using hec hms model applications

Penulis Makalah : Nanang Saiful Rizal, Kus Farukah

Identitas Makalah : a. Judul Prosiding : Proceeding of International Conference on Green Technology
 b. ISSN : 2580-7080
 c. Tahun Terbit : 1 Oktober 2017
 d. Penerbit : Fakultas Sains dan Teknologi UIN Malang
 e. Jumlah Halaman : 228

Kategori Publikasi Makalah *Prosiding* Forum Ilmiah Internasional
 Prosiding Forum Ilmiah Nasional

Hasil Penilaian *Peer Review* :

Komponen yang Dinilai	Nilai Maksimal <i>Prosiding</i>		Nilai Akhir Yang Diperoleh
	Internasional <input checked="" type="checkbox"/>	Nasional <input type="checkbox"/>	
a. Kelengkapan unsur isi buku (10%)	10		10
b. Ruang lingkup dan kedalaman pembahasan (30%)	29		29
c. Kecukupan dan kemutakhiran data/informasi dan metodologi (30%)	28		28
d. Kelengkapan unsur dan kualitas (30%)	28		28
Total = (100%)	95		95 x 2

Jember, 14 September 2018
 Reviewer 1



Dr. Gusfan Halik, ST., MT.
 19710804 199803 002
 Unit kerja : FT Universitas Jember

8,55

DETERMINATION OF CORRECTION VALUE Curve Number (CN) ON RIVER FLOODS WITH Form Factor > 8 USING HEC HMS MODEL APPLICATIONS

by Nanang Saful Rizal

Submission date: 11-Jul-2018 11:05AM (UTC+0700)

Submission ID: 981755614

File name: 2.pdf (453.04K)

Word count: 3752

Character count: 18987

DETERMINATION OF CORRECTION VALUE Curve Number (CN) ON RIVER FLOODS WITH Form Factor > 8 USING HEC HMS MODEL APPLICATIONS

Nanang Saiful Rizal* and Kus Farukah*

* Faculty of Engineering, University of Muhammadiyah Jember

Email : nanangsaifulrizal@unmuhjember.ac.id, civillian.farukah@gmail.com.

Article Info

Article history:

Received Jul 12th, 2017

Revised Aug 20th, 2017

Accepted Oct 26th, 2017

Keyword:

Hydrology
Parameters
River basin
Curve number

ABSTRACT

Hydrological analysis to obtain surface runoff in watershed (DAS) with oval shape (form factor > 8) often results in large errors (more than 20%) of field observations. This is because the determination of the parameters used the same as the normal watershed without any correction factor. Some influential parameters, including topographic forms of watersheds, land use, soil types, soil moisture. So for the estimation as well as correction of these factors used approach with HEC HMS model. In the HEC HMS model, influencing factors such as soil properties, geological formation and land use have been simplified by the name of the Curve Number (CN) factor. The value of the CN (curve number) varies from 100 (for waterlogged surfaces) to about 30 (for non-watertight surfaces with high infiltration values). The CN factor correction value that will be recommended in this research is yielding the smallest error with the largest correlation coefficient. After performing hydrological analysis by comparing field observation results, the DAS with oval shape was obtained by CN correction number of 1.2, with relative error (11.5%) and correlation coefficient (82%).

8

Copyright © 2017 Green Technology.
All rights reserved.

Corresponding Author:

Nanang Saiful Rizal,
Faculty of Engineering
University of Muhammadiyah Jember
Email: nanangsaifulrizal@unmuhjember.ac.id

I. INTRODUCTION

The results of the hydrological analysis to obtain surface runoff in the oval-shaped watershed (DAS) often result in large errors (more than 20%) of field observations. This is because the determination of the parameters used the same as the DAS with the normal form without any correction factor. Though the flow characteristics in the DAS with oval shape is very different, ie the peak flood time is shorter than the normal form of watershed [3]. Some influential parameters, including topographic forms of watersheds, land use, soil types, soil moisture [2]. The form factor of the watershed is obtained from the ratio of the watershed and the length of the main river [3]. Besides form factor, the supporting factor which also influences is geological formation [4]. One hydrological model that is often used today to control parameters, including HEC HMS. This model is often used because it is more accurate, counting operation is easier and its output can be combined with other software used in water availability, urban drainage, urbanization impact prediction, spillway design, reduction of flood damage, flood handling regulations, and hydrological operation system [5]. In the HEC HMS model, influencing factors such as soil properties, geological formation and land use have been simplified by the name of the Curve

Number (CN) factor. The value of the CN (curve number) varies from 100 (for waterlogged surfaces) to about 30 (for non-watertight surfaces with high infiltration values). Because the error value in the limbasan calculation than the observation field is still large (error > 10%), then there needs to be an analysis for the determination of correct correction factor CN value. The way to obtain CN factor correction value is by inserting some correction value of CN value on Hec HMS model, then result of calculation of surface runoff value compared with observation discharge. The CN factor correction value that will be recommended in this research is yielding the smallest error with the largest correlation coefficient.

Bedadung River is the main river that passes in the middle of Kota in Jember regency. Jember regency is a district located east of Java Island, Indonesia. Bedadung River Flow has a length of 141 km with an area of 2,271 km², which is geographically located 6 ° 27'9 " - 7 ° 14'33 " East Longitude and 7 ° 59'6 " - 8 ° 33 ' 56 " South Latitude.

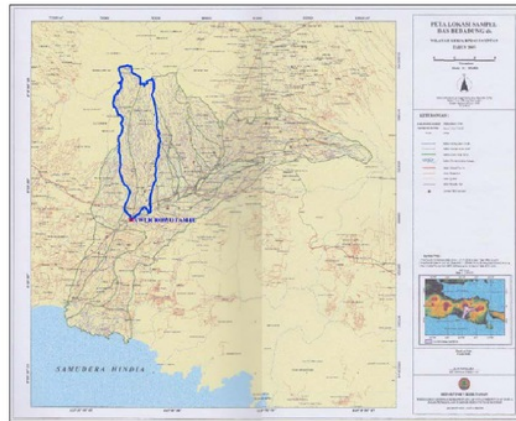



Figure 1. Location of research activity

River (DAS) Bedadung is topographically divided into three parts, the top is very steep with the slope of the land > 10%, the middle section between 3% s / d 10% and the bottom with a slope of <3%. At the top of the watershed is selected as a research area that most of the land use in the form of plantations and moor. Average annual rainfall is about 1800 mm. The highest monthly rainfall occurred in November with a monthly average rainfall of about 200 mm, while the lowest monthly rainfall occurred in June with a monthly average rainfall of about 150 mm.

II. RESEARCH METHODOLOGY

The Curve Number (CN) factor determined based on soil properties, geological formations and land use has been simplified by the name of the Curve Number (CN) factor with values varying from 100 (for waterlogged surfaces) to about 30 (for non- High infiltration). CN values are also affected by AMC (Antecedent Moisture Categories) or previous moisture values. The AMC values affect the volume values and the surface flow rate. The soil classification is hydrologically divided into 4 groups:

- A. Characteristic of soil with sand texture & deep profile, with infiltration rate > 0.75 cm / hour.
- B. Tektur sandy soil moan & shallow profile.
- C. Tektur loose clay soil & little BO content,
- D. Clay texture & infiltration rate < 0.15 cm / hour.

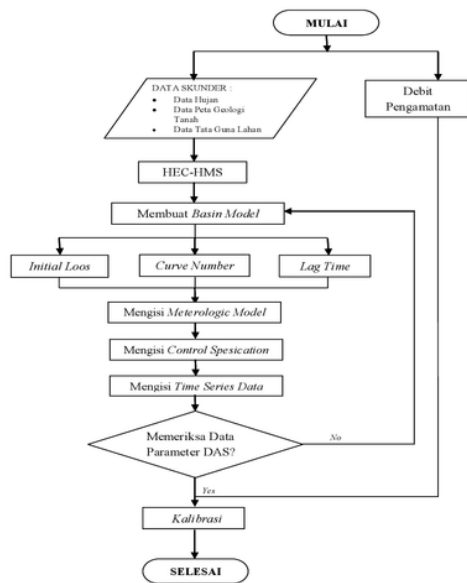

The stages performed for this research are: a). Calculate the maximum daily rainfall by polygon method (Thiessen Polygon), b). Calculate the value of the curve number using the soil geological map approach and land use map, c). Calculate the runoff SCS Curve Number (CN) and Hydrograph SCS Units, d). Make HMS Component Models, e). Make Time Series Data, f). Creating and filling the Basin Models, g). Filling Meteorologic Model, containing rain data and evapotranspiration data, h). Charging Control Specification, containing start and end time of calculation process, i) Filling Time-series Data, containing rain data, j) Checking Watershed Data, k). Doing Simulation, l). Conducting Calibration. M). Analysis of relative errors and correlations.

III. RESULTS AND DISCUSSION.

In the calculation of the average rainfall area using the daily rainfall data from 3 rain stations, namely Station (St) DAM Klatakan, DAM Tugusari and st. DAM Karanganom. Daily rainfall data is 25 years from 1990 until 2015. In the analysis of the average rainfall area used Polygon Thiessen method, the choice of this method is done because the number of rain stations only 3 (three) with the position spread evenly on the Bedadung River Basin. After the calculation of the extent of the influence of each station obtained coefficient value thiesen each station as presented in table 1.

Tabel 1. Thiessen Coefficient Bedadung river area

No	Nama of rain station	Area (Km ²)	Thiessen Coefficient
1	DAM Klatakan	70.342	0.6536
2	DAM Tugusari	5.89	0.0547
2	DAM Karanganom	31.396	0.2917
Amount		107.628	1.0000

Source : calculation results

The value of curve number (CN) can be started by determining the type of soil group. SCS developed a soil classification system based on soil properties, detailed soil maps, or soil infiltration rates. CN value is influenced by soil classification in Watershed, because in this research is not done research on soil classification. The soil classification in Bedadung River Basin is determined based on geological map of Jember Regency.

Table 2. Classification of soil groups

Ground Class	Soil Characteristics	Infiltration Rate (cm/h)
A	Deep sand, deep loess, aggregated dust	0.78-1.14
B	Loess shallow, sandy loam	0.38-0.78
C	Diamond clay, shallow sandy clay, low grade soil organic matter and high clay soil	0.13-0.38
D	Substantially expanding soils, if heavy clay, and certain saline soils	< 0.13

Sumber : HEC-HMS TechRefManualMar2000

Based on the above geological map in get that Bedadung River Basin consists of two types of land are:

1. Qvab (Breksi Argopuro) : Breccia volcano is arranged andesit, inserted lava.
2. Qaf (Argopuro Fume Deposition) : Rebellion of argopuro volcano rock.

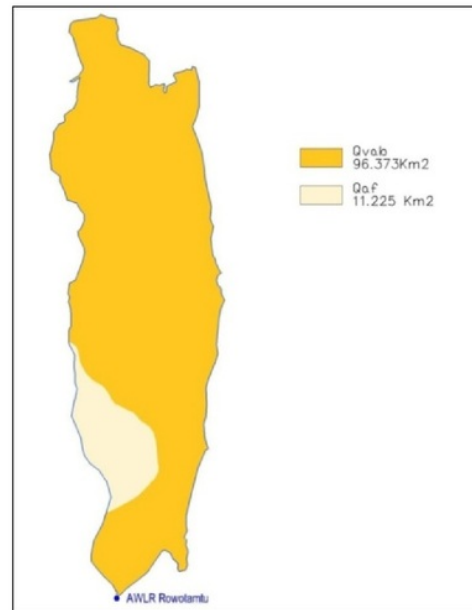


Figure 1. Geological Map in the Study Area

It can be concluded that most Bedadung Watershed has a physical condition of the soil that consists of volcanic eruptions with most of the sand and andesite rocks. So classification of land Bedadung watershed belonging to the category A namely: Soil characteristics with sand texture & deep profile, with infiltration rate > 0.75 cm / hour.

Table 3. Calculation of Curve Number (CN)

No	Land Use	Area (Km ²)	CN
1	Rice Fields Rain	6.482	65
2	Irrigated Rice Fields	7.709	63
3	Shrubs	7.586	68
4	Plantations and Forests	74.227	25
5	Settlement	6.295	51
6	Moor	5.236	65
7	Land	0.091	68

Source : calculation results

CN Composite =

$$\begin{aligned}
 & \frac{6.482 \times 65 + (7.709 \times 63) + (7.586 \times 68) + (74.227 \times 25) + (6.295 \times 51) + (5.236 \times 65) + (0.091 \times 68)}{95 \times 51} \\
 & = 6.482 + 7.709 + 7.586 + 74.227 + 6.295 + 5.236 + 0.091 \\
 & = \frac{3946.093}{107.626} \\
 & = 36.7
 \end{aligned}$$

The calculation of SCS Curve Number (CN) runoff is as follows:

$$S = \frac{1000 - 10CN}{CN}$$

$$= \frac{1000 - 10 \times 36.7}{36.7}$$

$$= 17.3$$

$$I_a = 0.2 \times S$$

$$= 0.2 \times 17.3 = 3.45 \text{ mm}$$

In this research will be used SCS unit hydrograph method. The SCS hydrograph unit model is a single-peaked hydrograph model and a dimensionless hydrograph. SCS hydrograph can be used easily, the main parameter required is the time lag between the effective rain point and the hydrograph weight. These parameters are based on data from some catchment areas. Calculation of Time lag (t_{lag}) is as follows :

$$T_c = 0.57 \times A^{0.41}$$

$$= 0.57 \times 107.628^{0.41}$$

$$= 3.88 \text{ Jam (232.871 minutes)}$$

$$t_{lag} = 0.6 \times T_c$$

$$= 0.6 \times 3.88$$

$$= 2.33 \text{ Jam (139.723 minutes)}$$

a). Modeling by Using HEC-HMS

In this model, there are several kinds of hydrograph methods of synthetic units. While to complete this hydrological analysis is used synthetic hydrographsatuan of SCS (soil conservation service) by analyzing several parameters, then this hydrograph can be adapted to the conditions in Bedadur River Basin. As a comparison, the data is recorded from the automatic discharge meter AWLR (Automatic water level recorder) located in Rowotamtu, Rambipuji Sub-district, Jember District.

Physical representation of watershed and river areas is present and arranged on the model basin. The hydrological elements are related in the tissues that simulate a direct runoff process. The elements used to simulate runoff are subbasins and junctions. The model elements of Bedadung River Basin are presented in Figure 2.

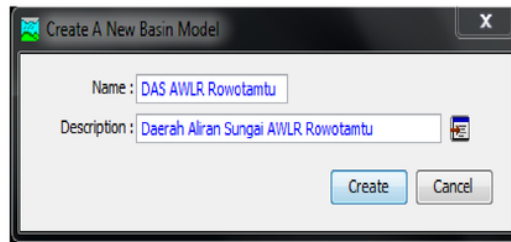


Figure 2. The creation of sub-river basin names

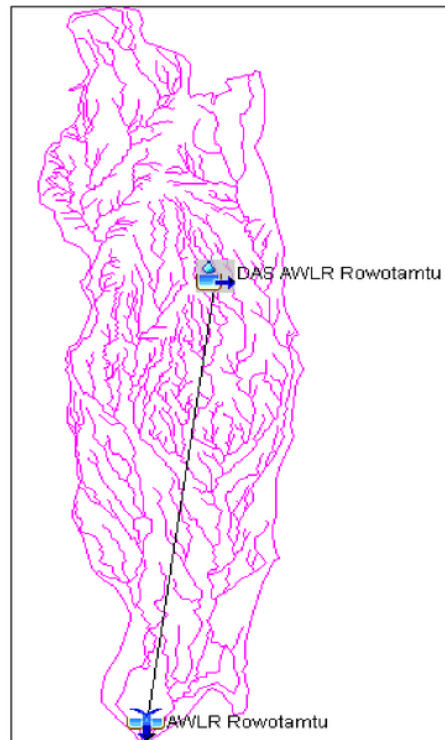


Figure 3. Subbasins and granting elements

Sub-basin Loss Rate Method (Water loss process), is a way to calculate water loss that occurs through infiltration process. SCS developed empirical parameter curve number which assumes various factors of soil layer, land use, and porosity to calculate total rainfall runoff. SCS Curve Number consists of several parameters that must be input is initial loss or initial infiltration value, SCS Curve Number, and imperviousness. For initial infiltration value and SCS Curve Number can be seen in figure 4.

Basin Name: DAS AWLR Rowotamtu	
Element Name: DAS AWLR Rowotamtu	
Initial Abstraction (MM)	3.45
*Curve Number:	36.7
*Impervious (%)	0.0

Figure 4. Sub-basin values Loss Rate Method
(process of water loss)

The hydrograph unit is a very familiar and reliable method. In HEC-HMS, SCS hydrographs can be used easily, the main parameter required is the time lag between the effective raindrop and the hydrograph weight. The lag time is equal to 0.6 time concentration (E.E. Daniil, S.N. Michaas, 2005). The parameters are needed to calculate the peak and hydrograph time, automatically the SSS model will form the ordinate for hydrograph tops and time functions.

Basin Name: DAS AWLR Rowotamtu	
Element Name: DAS AWLR Rowotamtu	
Graph Type:	Standard
*Lag Time (MIN)	139.723

Figure 5. Value of Sub-basin Transform
(hydrograph transformation of runoff unit)

Baseflow can be interpreted as a baseline flow, this model is used to describe the base flow that occurs during runoff so it can be calculated the height of the hydrograph peak that occurs. In the modeling method used recession (recession) with the assumption that the base flow is always there and has a hydrograph peak in one unit of time and has a relationship with rainfall (precipitation).


The parameters used in this recession model are initial flow, recession ratio and threshold flow. Initial flow is a calculated baseline flow value or from observational data, the recession ratio constant is the value of the ratio between the current and yesterday flow constantly has a value of 0 to 1. While the threshold flow is the threshold value of the runoff flow and the baseline flow. To calculate this value can be used exponential way or assumed with a large value ratio from peak to peak (US Army Corps of Engineering, 2001).

Basin Name: DAS AWLR Rowotamtu	
Element Name: DAS AWLR Rowotamtu	
Initial Type:	Discharge
*Initial Discharge (M3/S)	3.31
*Recession Constant:	0.9
Threshold Type:	Ratio To Peak
*Ratio:	0.01

Figure 6. Value of Sub-Basin Baseflow method
(Basic flow process)


b). Meteorologic Model (Rain Data Model)

The selection of rain stations to be used in the analysis is done by clicking on the rainfall data pilot that has been done before (in Watershed Explorer), in this research is Specified Hyetograph. Next select the rain station to use.

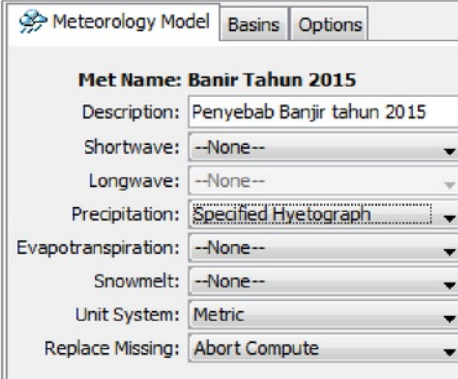

Meteorology Model	
Basins Options	
Met Name:	Banir Tahun 2015
Description:	Penyebab Banjir tahun 2015
Shortwave:	--None--
Longwave:	--None--
Precipitation:	Specified Hyetograph
Evapotranspiration:	--None--
Snowmelt:	--None--
Unit System:	Metric
Replace Missing:	Abort Compute


Figure 6. Options meteorologic model filling (rain data model)

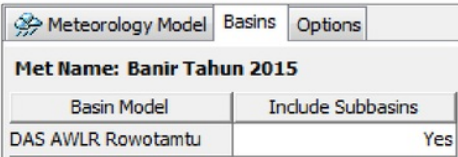

Meteorology Model	
Basins Options	
Met Name:	Banir Tahun 2015
Basin Model	Include Subbasins
DAS AWLR Rowotamtu	Yes

Figure 7. Selection of rain station on the watershed

The hydrograph design should be based on real rainfall events. Precipitation data input or effective rainfall during floods, can be 5 minutes, hour-time or daily. It should be noted that the rainfall area obtained from the average rainfall thiessen method with respect to the influence of rainfall stations in the area.

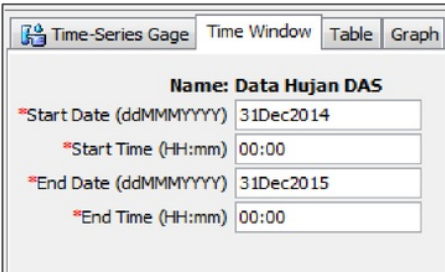

Time-Series Gage	
Time Window Table Graph	
Name:	Data Hujan DAS
*Start Date (ddMMYYYY)	31Dec2014
*Start Time (-H:mm)	00:00
*End Date (ddMMYYYY)	31Dec2015
*End Time (-H:mm)	00:00

Figure 8. Preparation time rainfall data

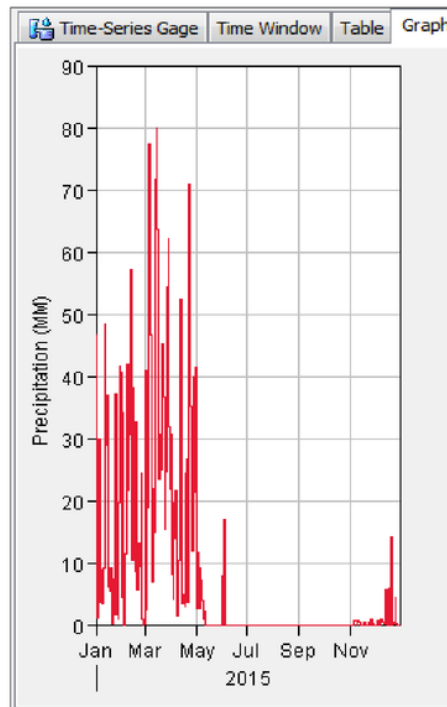


Figure 9. Time Series Data Value
(Rain Data Charging)

Control Specifications contains the input time of the start and end of the program running and the desired time interval (15min, 1hr, or 1day). The procedure used is the same as basinmodel or meteorological model.

Figure 10. Value of Control Specifications
(Running time)

Once all of the above input variables are entered, to execute modeling in order 9 to run then the model and model meteorologic models should be unified. The execution result of this method can be seen in the graph and the output value below. The output below is the flood discharge plan for the 1st anniversary period.

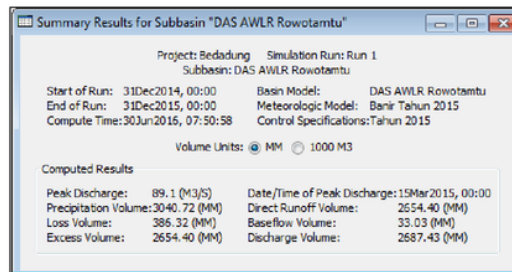


Figure 11. Results of the peak time simulation process And peak discharge

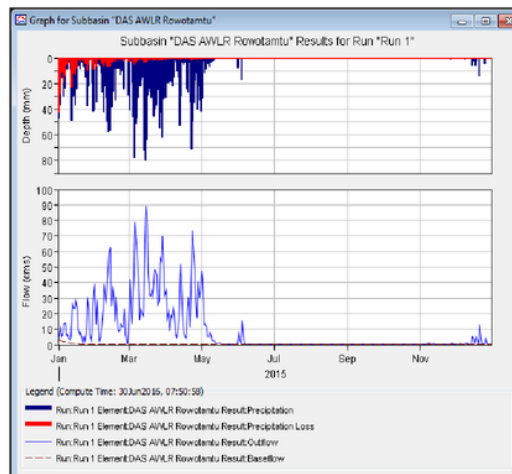


Figure 12. Bedadung Watershed Hidrograph

The results of the HEC-HMS model simulation for 2015 as shown in Figure 5.14 above. Obtained top discharge simulation model of 89.1 m³ / dt and total outflow volume of 2687.43 mm with peak discharge time occurred on March 15, 2015. For the initial stages of testing, model calibration based on rain data and measured discharge data in 2015. The calibration Done based on the parameters contained in the basin model is the value of initial abstraction, curve number, and time lag.

From the parameters of the first selected initial parameters are used as an initial condition, then the parameters are made independent variable is determined its value by way of retest until the obtained values that meet. While for other parameters made dependent variable, it aims to facilitate in optimizing. The criterion that meets the value is if from the values obtained graphs that are similar between the measured debit graph with the calculated debit. In this study for independent variables in the set is the value of curve number and initial abstraction while the dependent variable is the time lag. The calibration data can be observed for model work by observing differences in observational discharge and theoretical discharge.

Based on the result of HEC-HMS method analysis got the peak discharge simulation model of 89.1 m³ / dt and the total outflow volume of 2687.43 mm with peak discharge time occurred on March 15, 2015. While for the observation debit of Bedadung River Basin readout result is peak discharge of 335.9 m³/s and total outflow volume of 7105.97 mm with peak discharge time on March 6, 2015.

c). Recapitulation of Calibration Results.

By simulating simultaneously, at various variations of CN values, the values of correlation coefficients and relative errors vary. The results are shown in Table 4.

Table 3. Calculation of Relative Error

Alternatif	Uraian	Nilai	Koefesien Korelasi	Kesalahan Relatif
1	CN	36.66	0.6697	0.7347
	Ia	3.45		
	Lag Time	139.72		
2	CN	40.00	0.6766	0.7314
	Ia	3.00		
	Lag Time	139.72		
3	CN	45.00	0.6841	0.7288
	Ia	2.44		
	Lag Time	139.72		
4	CN	50.00	0.6906	0.7267
	Ia	2.00		
	Lag Time	139.72		
5	CN	55.00	0.6962	0.7252
	Ia	1.64		
	Lag Time	139.72		
6	CN	60.00	0.7015	0.7240
	Ia	1.33		
	Lag Time	139.72		
7	CN	65.00	0.7058	0.7231
	Ia	1.08		
	Lag Time	139.72		
8	CN	70.00	0.7101	0.7228
	Ia	0.86		
	Lag Time	139.72		
9	CN	75.00	0.7139	0.7222

Source : calculation results

After a comparison of some of the alternatives presented in tables and graphs can be concluded on the 13th alternatives that have the highest correlation coefficient (0.7249) and the relative error is the smallest (0.7216). The difference between the correlation coefficient and the relative error on alternate-13 is 0.0033.

Table 5. Comparison of correlation coefficient values and Relative error at various CN variation values And Ia

No	CN	Ia	correlation coefficient	Relative error	differe nce
1	36.665	3.455	0.670	0.735	0.065
2	40.000	3.000	0.677	0.731	0.055
3	45.000	2.444	0.684	0.729	0.045
4	50.000	2.000	0.691	0.727	0.036
5	55.000	1.636	0.696	0.725	0.029
6	60.000	1.333	0.702	0.724	0.022
7	65.000	1.077	0.706	0.723	0.017
8	70.000	0.857	0.710	0.723	0.013
9	75.000	0.667	0.714	0.722	0.008
10	80.000	0.500	0.717	0.722	0.005
11	85.000	0.353	0.721	0.722	0.001
12	90.000	0.222	0.723	0.722	0.001
13	95.000	0.105	0.725	0.722	0.003

Source : calculation results

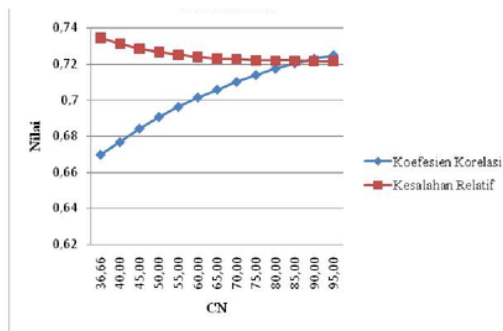


Figure 13. Graph of Correlation Value Calculation And Relative Error to CN Value

IV. CONCLUSION

From the analysis, Response Assessment Watershed Hydrological Program Bedandung with HEC-HMS with secondary data processing and automatic debit data at the point AWLR Rowotamtu located in the district of Jember Rambipuji can be summarized as follows:

1. By determining the value of surface runoff coefficient (curve number) and initial abstraction as independent variable, while the duration of concentration (lag time) as dependent variable. Showed that there is a relationship (correlation coefficient) which tightly between flood discharge calculation methods HEC-HMS with discharge on the observation of the field recording Rowotamtu AWLR tool. With correlation coefficient values for various curve number and initial abstraction values ranging from 0.6697 to 0.7249.
2. Based on the analysis method of HEC-HMS obtained peak discharge model simulation results of 83.5 m³ / s and total volume of outflow amounting to 3027.30 mm with a peak discharge occurred on March 15, 2015. While the observation of the discharge readings obtained AWLR rowotamtu peak discharge of 335.9 m³ / s and total outflow volume of 7105.97 mm with peak discharge time on March 6, 2015.
3. For the purposes of the calculation of flood discharge using HEC-HMS at Rowotamtu AWLR basin located in the district of Jember Rambipuji drawn from the data that has a value that is the highest correlation coefficient. The recommended parameters are as follows:
 - a). Curve Number: 95
 - b). Initial Abstraction: 0.11 mm
 - c). Lag Time: 139.72 minutes

Bibliography

- [1] A. S. William and J. F. Fleming, *Hydrologic modeling system HEC-HMS User's Manual*, U.S. Army Corps of Engineers, Aug. 2010, pp. 306.
- [2] Aplikasi Hidrologi, Dr. Ir. Drs. Nugroho Hadisusanto, Dipl.H. Penerbit : Jogja Mediautama, Malang, Tahun 2010.
- [3] Analisis Hidrologi, Sri Harto Br, Penerbit : PT. Gramedia Pustaka Utama, Jakarta, Tahun 1993.
- [4] *(HEC-HMS Technical Reference Manual, 2000:40)*.
- [5] Saiful Rizal, Nanang, 2014, Aplikasi Perencanaan Sistem Irigasi Dan Bangunan Air, Jember : LPPM Universitas Muhammadiyah Jember
- [6] Azizah Affandy, Nur dkk, 2008, Pemodelan Hujan Debit Menggunakan Model HEC-HMS di DAS Jember Baru, Surabaya : Institut Teknologi Sepuluh November
- [7] Syahputra, Ichsan, 2015, Kajian Hidrologi dan Analisa Kapasitas Tampang Sungai KreungLangsa Berbasis HEC-HMS dan HEC-RAS, Aceh Besar : Universitas Abulyatama.
- [8] USACE. 2000. *Hydrologic Modelling System HEC HMS Technical Reference Manual*. March 2000. <http://www.hec.usace.army.mil>.
- [9] USACE. 2002. *Hydrologic Modelling System HEC HMS Applications Guide*. December 2002. <http://www.hec.usace.army.mil>.

[10]. USACE. 2000. *Geospatial Hydrologic Modelling Extension HEC GeoHMS Users Manual*. July 2000. <http://www.hec.usace.army.mil>.

DETERMINATION OF CORRECTION VALUE Curve Number (CN) ON RIVER FLOODS WITH Form Factor > 8 USING HEC HMS MODEL APPLICATIONS

ORIGINALITY REPORT

11%

SIMILARITY INDEX

11%

INTERNET SOURCES

2%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

1

conferences.uin-malang.ac.id

Internet Source

7%

2

repository.unika.ac.id

Internet Source

1%

3

Submitted to Universiti Sains Malaysia

Student Paper

1%

4

www.ijetch.org

Internet Source

1%

5

matriks.sipil.ft.uns.ac.id

Internet Source

<1%

6

Submitted to Universitas Jember

Student Paper

<1%

7

iwhw.boku.ac.at

Internet Source

<1%

8

repository.uin-malang.ac.id

Internet Source

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off