

DeliveryCoin: An IDS and Blockchain-Based Delivery Framework for Drone-Delivered Services

Volume 8 · Issue 3 | September 2019



Search for Articles:

Title / Keyword

Author / Affiliation

Computers

All Article Types

Search

Advanced

Journals / Computers / Editorial Board



computers

Submit to Computers

Review for Computers

Journal Menu

- Computers Home
- Aims & Scope
- Editorial Board
- Reviewer Board
- Instructions for Authors
- Special Issues
- Article Processing Charge
- Indexing & Archiving
- Most Cited & Viewed
- Journal Statistics
- Journal Awards
- Editorial Office

Journal Browser

- Forthcoming issue
- Current issue

- | | |
|---------------|---------------|
| Vol. 9 (2020) | Vol. 4 (2015) |
| Vol. 8 (2019) | Vol. 3 (2014) |
| Vol. 7 (2018) | Vol. 2 (2013) |
| Vol. 6 (2017) | Vol. 1 (2012) |
| Vol. 5 (2016) | |

Editorial Board

Editors (2)

Prof. Dr. Paolo Bellavista Website

Editor-in-Chief

Department of Computer Science and Engineering (DISI), University of Bologna, 40136 Bologna, Italy
Interests: wireless sensor and actuator networks; middleware for sensor and actuator networks; vehicular sensor networks; edge computing; fog computing; online stream processing of sensing dataflows; IoT and big data processing; pervasive and mobile computing; cooperative networking; cyber physical systems for Industry 4.0



Special Issues and Collections in MDPI journals

Prof. Dr. Wenbing Zhao Website

Associate Editor

Department of Electrical Engineering and Computer Science, Cleveland State University, Ohio, 44011, USA
Interests: human computer interaction; rehabilitation; computer vision; distributed systems



Special Issues and Collections in MDPI journals

Previous Editor

Prof. Dr. Aaron Quigley Website

Former Editor-in-Chief

School of Computer Science, North Haugh, The University of St Andrews, Fife, KY16 9SX, Scotland, UK
Interests: human computer interaction; pervasive computing; information visualization

Editorial Board Members (57)

Filter Editorial Board Members

Filter

Prof. Dr. Manuel E. Acacio Website

Faculty of Computer Science, Campus de Espinardo, Facultad de Informatica, Universidad de Murcia, Murcia 30100, Spain
Interests: chip-multiprocessor architectures (CMPs); cache coherence protocols; reduced energy consumption; fault tolerance in CMPs; hardware transactional memory; synchronization primitives; multiprocessor architectures; cache coherence protocols for SMPs and cc-NUMAs; specialized architectures; parallel programming environments; performance evaluation

Dr. Bradley Alexander Website

School of Computer Science, University of Adelaide, Adelaide, South Australia, 5005, Australia
Interests: computer science education; compiler optimisation; genetic programming

Dr. Pedro Alonso Jordá Website

Department of Information System and Computation, Universitat Politècnica de València, Camino de Vera, s/n, 46022 Valencia, Valencia, Spain

Interests: parallel computing; numerical algorithms; GPU computing; structured matrices

Special Issues and Collections in MDPI journals:

Special Issue in *Computers*: Energy Aware Computing

Back to Top

Dr. Mostafa Rahimi Azghadi Website

College of Science & Engineering, James Cook University, Townsville City QLD 4814, Australia
Interests: neuromorphic engineering; spiking neural networks; memristors and memristive systems; Very Large Scale Integration (VLSI) design; embedded systems; quantum cellular automata



Prof. Dr. Matthias Baldauf Website

Institute for Information and Process Management, University of Applied Sciences St.Gallen, Switzerland
Interests: human-computer interaction; mobile and pervasive computing; e-government

Special Issues and Collections in MDPI journals:

Special Issue in *Multimodal Technologies and Interaction*: Smart Devices Interaction

Dr. Silvia Biasotti Website

Istituto di Matematica Applicata e Tecnologie Informatiche, Consiglio Nazionale delle Ricerche, Genova, Italy
Interests: Geometric modelling; Shape analysis; 3D shape recognition and classification



Special Issues and Collections in MDPI journals:

Special Issue in *Sustainability*: Advances in 3D Scanning Analysis for Cultural Heritage Applications

Prof. Dr. Fernando Bobillo Website

Department of Computer Science and Systems Engineering (University of Zaragoza) Ada Byron Building (School of Engineering and Architecture), María de Luna 1, 50018, Zaragoza, Spain
Interests: semantic web; fuzzy logic; knowledge representation; reasoning; mobile computing



Special Issues and Collections in MDPI journals:

Special Issue in *Sci*: Analysis of Uncertainty in Ontologies and Semantic Web

Dr. Paul Bogdan Website

Department of Electrical Engineering Systems, University of Southern California, Los Angeles, CA, USA
Interests: embedded systems; multicore systems; on-chip communication; low-power design; cyber-physical systems

Special Issues and Collections in MDPI journals:

Special Issue in *Computers*: Embedded Multi-Core Systems

Back to Top

Prof. Dr. João M. P. Cardoso [Website](#)
Rua Dr. Roberto Frias, s/n, 4200-465 Porto, Portugal
Interests: Compilers; High-Level Synthesis; Reconfigurable Computing; FPGAs; Hardware Accelerators; High-Performance Embedded Computing; Energy Efficient Computing



Prof. Dr. Robertas Damaševičius [Website](#)
1. Department of Software Engineering, Kaunas University of Technology, Kaunas, Lithuania
2. Faculty of Applied Mathematics, Silesian University of Technology, Gliwice, Poland
Interests: assisted living systems, multimodal computer interfaces, digital health, computational intelligence
Special Issues and Collections in MDPI journals:
Special Issue in *Computers*: Selected Papers from the 24th International Conference on Information and Software Technologies (ICIST 2018)
Special Issue in *Information*: Cloud Gamification
Special Issue in *Electronics*: Computational Intelligence for Physiological Sensors and Body Sensor Networks
Special Issue in *Computers*: Selected Papers from the 25th International Conference on Information and Software Technologies (ICIST 2019)
Special Issue in *Information*: Cloud Gamification 2019
Special Issue in *Electronics*: Application of Advanced Computing, Control and Processing in Engineering



Dr. M. Ali Akber Dewan [Website](#)
School of Computing and Information Systems, Faculty of Science and Technology, Athabasca University, 1 University Drive, Athabasca, AB T9S 3A3, Canada
Interests: image processing, computer vision; machine learning; pattern recognition, adaptive biometrics; artificial intelligence; medical image analysis



Dr. Anind Dey [Website](#)
Human-Computer Interaction Institute, Carnegie Mellon University, NSH 2502C, 5000 Forbes Ave., Pittsburgh, PA 15213-3891, USA
Interests: human-computer interaction; ubiquitous and pervasive computing; software toolkits

Dr. Javier Diaz-Montes [Website](#)
Rutgers Discovery Informatics Institute (RDI2), Rutgers University, 96 Frelinghuysen Road, Piscataway, NJ 08854, USA
Interests: cloud computing; autonomous computing; virtualization; middleware; scheduling

Prof. Dr. Jack Dongarra [Website](#)
Innovative Computing Laboratory, EECSS Department, 1122 Volunteer Blvd, University of Tennessee, Knoxville, TN 37996-3450, USA
Interests: parallel computing; mathematical software; linear algebra; performance evaluation

Prof. Dr. Anna Rita Fasolino [Website](#)
Department of Electrical Engineering and Information Technology (DIETI), University of Naples Federico II, Via Claudio 21-80125 Napoli, Italy
Interests: software engineering; software testing; software maintenance; reverse engineering; mobile application testing; software quality



Prof. Dr. Massimo Ficco [Website](#)
Department of Engineering, University of Campania Luigi Vanvitelli, Via Roma 29, 81031 Aversa, Italy
Interests: cloud security and mobile computing; data mining; big data; cyber security; network security
Special Issues and Collections in MDPI journals:
Special Issue in *Future Internet*: Advanced Techniques for Internet, P2P and Cloud Computing—selected papers from 3PGCIC-2018
Special Issue in *Future Internet*: Frontiers in Cyber Security



Dr. Martin Fleury [Website](#)
School of Computer Science and Electronic Engineering, University of Essex, UK
Interests: multimedia networks; video streaming over wireless networks; P2P streaming; video coding; video security
Special Issues and Collections in MDPI journals:
Special Issue in *Information*: Network and Rateless Coding for Video Streaming
Special Issue in *Applied Sciences*: Recent Developments on Multimedia Computing and Networking



Prof. Dr. Emanuele Frontoni [Website](#)
Department of Information Engineering, Università Politecnica delle Marche, Ancona, Italy
Interests: computer vision; robotics, machine learning; deep learning
Special Issues and Collections in MDPI journals:
Special Issue in *Sensors*: Machine Learning Methods for Image Processing in Remote Sensing
Special Issue in *Informatics*: Machine Learning in Industry 4.0: From Predictive Maintenance to Design Support Systems



Dr. Ann Gordon-Ross [Website](#)
Department of Electrical and Computer Engineering, University of Florida, Gainesville, FL 32611, USA
Interests: computer engineering; low-power design; embedded systems; reconfigurable computing; platform design; aerospace system; fault tolerance; dynamic optimizations; hardware design; real-time systems; computer architecture; multi-core platforms
Special Issues and Collections in MDPI journals:
Special Issue in *Computers*: Multi-Core Systems-On-Chips Design and Optimization



Dr. Sabine Graf [Website](#)
School of Computing and Information Systems, Faculty of Science and Technology, Athabasca University, 1200, 10011-109 Street, Edmonton, AB T5J3S8, Canada
Interests: user/learner modelling, adaptive and personalized systems, learning/academic analytics, educational data mining, artificial intelligence in education, technology enhanced learning



Prof. Dr. Stefan Gumhold [Website](#)
Professorship for Computer Graphics and Visualization, Technische Universität Dresden, 01062 Dresden
Interests: Scientific Visualization, Visual Analysis; Geometry Processing; 3D Acquisition; Scene Understanding



Dr. Margaret Hamilton Website

School of Computer Science and Information Technology, RMIT University, Melbourne, Victoria 3001 Australia

Interests: software engineering in mobility, modelling, testing, ethnographic action research; computer science education including new technologies, problem-based learning, work-integrated learning and academic integrity

Prof. Dr. Reiko Heckel Website

Department of Informatics, University of Leicester, Leicester, LE1 7RH, UK

Interests: graph transformation theory and application, model-based software engineering; formal models for service-oriented and P2P architectures; stochastic modelling and analysis of dynamic networks (social, biological and technical)



Dr. Mohamed Kaïniche Website

Laboratoire d'Analyse et d'Architecture des Systèmes (LAAS-CNRS), Toulouse, France

Interests: resilient and dependable computing; security; model-based and experimental assessment; safety-critical systems; intrusion detection systems; software reliability and security engineering; IoT



Prof. Dr. Tai-hoon Kim Website

Department of Convergence Security Engineering, Sungshin Women's University, South Korea

Interests: security engineering, bio-metrics, sensor network; big-data application

Special Issues and Collections in MDPI journals:

Special Issue in *Future Internet*: u- and e- Service, Science and Technology



Dr. Hyunbum Kim Website

Department of Computer Science, University of North Carolina at Wilmington, NC 28403, USA

Interests: sensors; networks; unmanned aerial vehicles; smart cities; security



Prof. Dr. Dae-Kyoo Kim Website

Department of Computer Science and Engineering, Oakland University, USA

Interests: Software design patterns; Software access control; Software modeling; Software security and interoperability in Smart Grid; Software maintenance; Software Architecture; Software process; Requirements engineering; Software verification and validation; Self-adaptive systems; Mobile software; Automotive software; Distributed Data Service (DDS)



[Back to Top](#)

Dr. Yevgeniya Kovalchuk Website

School of Computing and Digital Technology, Birmingham City University, Birmingham B5 5JU, UK

Interests: artificial intelligence; machine learning; software engineering; embedded systems; software-hardware integration; sensors and wearables; cyber security; multi-agent systems; healthcare informatics; movement science and movement and art therapy

Special Issues and Collections in MDPI journals:

Special Issue in *Information*: e-Health Pervasive Wireless Applications and Services (e-HPWAS'18)

Special Issue in *Information*: e-Health Pervasive Wireless Applications and Services (e-HPWAS'19)



Dr. Robert S. Laramée Website

Department of Computer Science, Swansea University, Swansea SA2 8PP, Wales, United Kingdom

Interests: data visualization; scientific visualization; information visualization; visual analytics

Special Issues and Collections in MDPI journals:

Special Issue in *Informatics*: Interactive Visualizations: Design, Technologies, and Applications

Special Issue in *Computers*: Selected Papers from the Computer Graphics & Visual Computing (CGVC 2018)



Prof. Dr. Lucia Maddalena Website

Institute for High-Performance Computing and Networking, National Research Council (CNR), Naples, Italy

Interests: Image Processing; Digital Film Restoration; Moving Object Detection; Scene Background Modeling; Omics Imaging; Metabolic Network Analysis



Dr. Leandros Maglaras Website

School of Computer Science and Informatics of De Montfort University, Leicester, UK

Interests: Industrial Controls Systems Security, Data Mining, Critical Infrastructure Protection, Risk Management



Prof. Dr. Radu Mardare Website

Department of Computer Science, Aalborg University, Selma Lagerlöfs Vej 300, DK-9220 Aalborg, Denmark

Interests: theoretical computer science; logic; model theory; category theory; set theory



Prof. Dr. Klaus D. McDonald-Maier Website

Embedded and Intelligent Systems Research Laboratory, School of Computer Science and Electronic Engineering, University of Essex, Wivenhoe Park, Colchester, CO4 3SQ, UK

Interests: Embedded Systems and System-on-Chip design with focus on security, power, performance and reliability; advanced embedded systems and processor architectures targeted for cyber physical systems, automotive/industrial, robotics, image processing, networked and distributed sensor nodes/Internet of Things and real-time critical systems; Big Data Analytics, computer vision and embedded AI for real world problems and application areas



Prof. Dr. Mariofanna Milanova Website

Department of Computer Science, University of Arkansas at Little Rock, Little Rock, Arkansas, 72204, USA

Interests: computer vision; human computer interaction; AI; machine learning; evolutionary computation; augmented reality; computer graphics




Dr. Seyedali Mirjalili Website

School of Information and Communication Technology, Griffith University, Brisbane, 4111 QLD, Australia

Interests: robust optimization; multi-objective optimization; swarm intelligence; artificial intelligence; metaheuristics; neural network



Table of Contents



Computers, Volume 8, Issue 3 (September 2019)

- Issues are regarded as officially published after their release is announced to the table of contents alert mailing list.
- You may [sign up for e-mail alerts](#) to receive table of contents of newly released issues.
- PDF is the official format for papers published in both, html and pdf forms. To view the papers in pdf format, click on the "PDF Full-text" link, and use the free [Adobe Reader](#) to open them.

Cover Story ([view full-size image](#)) In this paper, an intrusion detection system (IDS) and Blockchain-based delivery framework, [...] [Read more](#).

Order results

Publication Date

Result details

Compact

Show export options

Open Access

Article



Towards a Framework for Assessing IT Strategy Execution

Computers 2019, 8(3), 69; <https://doi.org/10.3390/computers8030069> - 13 Sep 2019

Viewed by 599

Back to Top

Open Access Article



Value Modeling for Ecosystem Analysis

Computers 2019, 8(3), 68; <https://doi.org/10.3390/computers8030068> - 13 Sep 2019

Viewed by 542

Open Access Article



Process-Aware Enactment of Clinical Guidelines through Multimodal Interfaces

Computers 2019, 8(3), 67; <https://doi.org/10.3390/computers8030067> - 11 Sep 2019

Viewed by 540

Open Access Article



CSCCRA: A Novel Quantitative Risk Assessment Model for SaaS Cloud Service Providers

Computers 2019, 8(3), 66; <https://doi.org/10.3390/computers8030066> - 08 Sep 2019

Viewed by 704

Open Access Article



Parliamentary Open Data in Scandinavia

Computers 2019, 8(3), 65; <https://doi.org/10.3390/computers8030065> - 06 Sep 2019

Viewed by 756

Open Access Article



An Attribute-Based Access Control Model in RFID Systems Based on Blockchain Decentralized Applications for Healthcare Environments

Computers 2019, 8(3), 57; <https://doi.org/10.3390/computers8030057> - 31 Jul 2019

Cited by 2 | Viewed by 1286

Open Access Review



Importance and Applications of Robotic and Autonomous Systems (RAS) in Railway Maintenance Sector: A Review

Computers 2019, 8(3), 56; <https://doi.org/10.3390/computers8030056> - 30 Jul 2019

Viewed by 1173

Open Access Article



Semantic Features for Optimizing Supervised Approach of Sentiment Analysis on Product Reviews

Computers 2019, 8(3), 55; <https://doi.org/10.3390/computers8030055> - 19 Jul 2019

Viewed by 1181

Open Access Article



A Complexity Metrics Suite for Cascading Style Sheets

Computers 2019, 8(3), 54; <https://doi.org/10.3390/computers8030054> - 10 Jul 2019

Viewed by 1143

Search for Articles:

Title / Keyword

Author / Affiliation

Computers

All Article Types

Search

Advanced

Journals / Computers / Volume 8 / Issue 3 / 10.3390/computers8030055



computers

Submit to this Journal

Review for this Journal

Edit a Special Issue

Article Menu

Article Overview

- Abstract
- Share and Cite
- Article Metrics
- Related Articles
- Order Article Reprints

Open Access Article

Semantic Features for Optimizing Supervised Approach of Sentiment Analysis on Product Reviews

by Bagus Setya Rintyarna ^{1,2,*} Riyanarto Sarno ¹ and Chastine Faticah ¹

¹ Department of Informatics, Institut Teknologi Sepuluh Nopember, Surabaya 60111, Indonesia

² Department of Electrical Engineering, Universitas Muhammadiyah Jember, Jember 68124, Indonesia

* Author to whom correspondence should be addressed.

Computers 2019, 8(3), 55; <https://doi.org/10.3390/computers8030055>

Received: 26 June 2019 / Revised: 15 July 2019 / Accepted: 16 July 2019 / Published: 19 July 2019

View Full-Text


Download PDF

Browse Figures



Article

Semantic Features for Optimizing Supervised Approach of Sentiment Analysis on Product Reviews

Bagus Setya Rintyarna ^{1,2,*} , Riyanarto Sarno ¹ and Chastine Fatichah ¹¹ Department of Informatics, Institut Teknologi Sepuluh Nopember, Surabaya 60111, Indonesia² Department of Electrical Engineering, Universitas Muhammadiyah Jember, Jember 68124, Indonesia

* Correspondence: bagus.setya@unmuhjember.ac.id

Received: 26 June 2019; Accepted: 16 July 2019; Published: 19 July 2019



Abstract: The growth of ecommerce has triggered online reviews as a rich source of product information. Revealing consumer sentiment from the reviews through Sentiment Analysis (SA) is an important task of online product review analysis. Two popular approaches of SA are the supervised approach and the lexicon-based approach. In supervised approach, the employed machine learning (ML) algorithm is not the only one to influence the results of SA. The utilized text features also handle an important role in determining the performance of SA tasks. In this regard, we proposed a method to extract text features that takes into account semantic of words. We argue that this semantic feature is capable of augmenting the results of supervised SA tasks compared to commonly utilized features, i.e., bag-of-words (BoW). To extract the features, we assigned the correct sense of the word in reviewing the sentence by adopting a Word Sense Disambiguation (WSD) technique. Several WordNet similarity algorithms were involved, and correct sentiment values were assigned to words. Accordingly, we generated text features for product review documents. To evaluate the performance of our text features in the supervised approach, we conducted experiments using several ML algorithms and feature selection methods. The results of the experiments using 10-fold cross-validation indicated that our proposed semantic features favorably increased the performance of SA by 10.9%, 9.2%, and 10.6% of precision, recall, and F-Measure, respectively, compared with baseline methods.

Keywords: sentiment analysis; product reviews; machine learning

1. Introduction

With the rapid growth of ecommerce platforms for online shopping, more and more customers share their opinions about products on the internet. This fact has generated a huge amount of opinion data within the platform [1]. The opinion data has then emerged as a valuable and objective source of product information for both customers and companies. For customers, it helps them by recommending that they buy a certain product [2]. For companies, it can help them in evaluating the design of a product [3] based on the analysis of user generated content (UGC), i.e., product reviews describing the user's experience [4]. With the quantity of the data, manual processing is not an efficient task. Alternatively, a big data analytics technique is necessary [5]. Sentiment Analysis (SA) has arisen in response to the necessity of processing the huge data in speed [6]. SA is a computational technique to automate the extraction of subjective information, i.e., opinion of customers with respect to a product [7]. For that reason, this study is important.

One of the most popular methods employed for SA tasks is the machine learning (ML)-based method [8], i.e., a supervised approach employing an ML algorithm. Although the role of the ML algorithm is important, it is not yet the only factor that determines the performance of SA. As a text classification task, another important factor influencing the SA result is the employed text features [9].

Semantic features are considered important for augmenting the result of SA tasks [10] by providing correct sense of a word according to its local context, i.e., sentence. Providing the correct sense of words means providing correct sentiment value that is important in extracting a robust feature set for supervised SA. The best we know, recent lexicon based approaches of SA studies that concern semantics of words, like the work of [11] and [10], have not been evaluated in a supervised environment.

Saif [11] has considered semantics of words by proposing a method called Contextual Semantics. The study introduced SentiCircle, which adheres to the distributional hypothesis that words that appear in similar contexts share identical meanings. This method has outperformed baseline methods when experimented and evaluated in several different sentiment lexicons, i.e., SentiWordNet [12], Multi-Perspective Question Answering (MPQA) subjectivity lexicon [13], and Thelwall-Lexicon [14] using several Twitter datasets, i.e., Obama McCain Debate (OMD), Health Care Reform (HCR), and Stanford Sentiment Gold Standard (STS-Gold).

Another work, [10], has also concerned semantic of words. The study provided extension for [11] by assigning prior sentiment value based on the context of the word using a graph-based Word Sense Disambiguation (WSD) technique. The work has also introduced a similarity-based technique to determine pivot words used in [11]. Tested in several product review domains, i.e., automotive, beauty, books, electronics, and movies, the result of this study has outperformed baselines in several performance metrics, i.e., precision, recall, and F-Measure. The result of [11] and [10] have highlighted the importance of semantics in SA tasks.

Meanwhile, other studies using the supervised approach commonly utilize the bag-of-words (BoW) feature or its extension as the base of the classification task. In this paper, we extend the previous lexicon-based approach presented in [10] to generate a set of sentiment features that is capable of capturing the semantics of words. The feature set was evaluated in a supervised environment.

Referring to the previously described research gap, the purposes for this study comprised:

1. Augmenting the results of supervised SA tasks for online product reviews by proposing a method for extracting sentiment features that takes into account semantics of words. The proposed method is the extension of [10].
2. Evaluating the semantic features in various ML algorithms and feature selection methods.
3. Finding the best set of the features using several feature selection methods.

In assigning the correct sense of the words in a review sentence, an adapted WSD method was used. In this method, the sense is picked from the WordNet lexical database. To calculate the numeric value of the feature, one of three sentiment values of the sense, i.e., positivity, negativity, and objectivity, is then picked from the SentiWordNet database [12]. Employing several WordNet similarity algorithms, we present a method to generate a semantic feature set of words. To evaluate the performance of our proposed semantic features, several ML algorithms and feature selection methods were employed. The employed ML algorithms and feature selection methods are implemented in WEKA, an open source tool containing algorithms for data mining applications [15]. The results of these experiments using 10-fold cross-validation indicated that our proposed semantic features favorably enhanced the performance of SA in terms of precision, recall, and F-Measure. The rest of this manuscript is organized in the following sections. Section 2 explores the most recent related study that has previously been done. Section 3 describes the method for extracting semantic features of words, including the formulas that are introduced. We explain the scenario of the experiments and the results in Section 4. The results of the experiments are discussed in Section 4. Finally, we highlight the effectiveness of our proposed method in Section 5.

2. Related Work

The expansion of online shopping has triggered consumer to express their opinion about a product they have purchased on ecommerce platform. SA is an efficient text mining technique to extract the opinion from online product reviews [16]. Two types of approaches that is commonly employed to

perform SA task, i.e., supervised approach and lexicon based approach [17]. Supervised approaches make use of labeled training data to learn the model. Using an ML algorithm, the model is then performed to test the dataset. Using Hybrid ML approach, Al Amrani [18] performed SA on an Amazon review dataset. A number of decision trees at randomly selected features were firstly picked to forecast the class of test dataset. Support Vector Machine (SVM) was then used to maximize the margin that separates two classes. Since RF was not sensitive to input, the default parameters were used for each classifier. The method was applied to the Amazon review dataset.

To optimize the SA task, Singh [19] employed four ML classifiers, i.e., Naïve Bayes, J48, BFTree, and OneR. NLTK and bs4 libraries were used for preprocessing of raw text. Using three manually annotated datasets, i.e., Woodlan's wallet, digital camera reviews, and movie reviews from IMDB, the robustness of the classifiers was compared. WEKA 3.8 was used for implementing the classifiers. The results of the experiment confirmed that OneR was the most prominent in accuracy.

Conditional Random Field (CRF) and SVM was employed for sentiment classification of online reviews [16]. CRF was used to extract emotional fragment of the review from a Unigram features of the text. SVM transformed data that is not linearly separable into linearly separable dataset in the feature space through nonlinear mapping. The proposed method was evaluated using Chinese online reviews from Autohome and English online reviews from Amazon. To segment the review, the jieba library of Python was employed. The results of the experiment indicated that average accuracy achieved was 90%.

A study formed a classifier ensemble consisting of Multinomial Naïve Bayes, SVM, Random Forest, and Logistic Regression to improve the accuracy of SA. The utilized feature was BoW represented by a table in which the column represents the term of the document, and the values represent their frequencies. The sentiment orientation was determined using majority voting and the average class probability of each classifier. Using four benchmarks of the Twitter dataset, i.e., Sanders, Stanford, Obama–McCain Debate, and HCR, the experiment revealed that the method can improve the accuracy of SA tasks on Twitter.

Mukherjee [20] optimized the SA approach for product reviews by developing a system to extract both potential product features and the associated opinion words. In terms of SA tasks, product features extracted in this work are actually aspect. The pair of product features and their associated opinion words was extracted by making use of grammatical relation provided by the Stanford Dependency Parser. The evaluation was conducted using two datasets from [21,22]. The system outperformed several baseline systems. Using two scenarios of the experiment, i.e., rule-based classification and supervised classification using SVM, the results of the study confirmed that the supervised classification significantly outperformed the Naïve rule-based classification.

Meanwhile, a lexicon-based SA approach relies on a pre-built Sentiment Lexicon, i.e., a pre-built list of sentiment terms with their associated sentiment value that is publicly available, e.g., Opinion Lexicon, General Inquirer, and SentiWordNet [12]. The sentiment of the term's overall document is then aggregated to determine its sentiment orientation. The main challenge of the lexicon-based approach is to improve a term's sentiment value with respect to a specific context [23] since the same term can have different sentiment values when it appears in different contexts [24].

In that regard, Saif [11] has proposed a method to learn sentiment orientation of words from their contextual semantics. Based on a hypothesis that words appearing in similar contexts tend to share similar meanings, the work proposed a method called SentiCircle. The method was tested on several benchmarks of the Twitter dataset. The results of the experiment indicated that SentiCircle outperformed several baseline methods.

A study has improved the implementation of SentiCircle in the online review dataset by considering semantics of words [10]. The study argued that the result of SentiCircle is valid only if the prior sentiment value of words is also valid so that θ of SentiCircle will adjust sentiment value of words in the right direction. Semantics of words is extracted using a WSD technique. The sentiment value

of words was picked from SentiWordNet. The method has been proven more robust against several baseline methods.

From the previously described recent related works, several insights can be highlighted as follows:

1. BoW is a common text features utilized for supervised SA tasks. To show the robustness of our proposed features against BoW, we will compare the performance of our proposed features with two baselines of BoW, i.e., Unigram (Baseline 1) and Bigram (Baseline 2).
2. Since semantics has the potential to enhance the performance of SA, we extent a lexicon-based method [10] to extract text features that capture semantics of words based on its local context, i.e., sentence to provide correct sentiment value of words. We evaluate the performance in a supervised environment. We train the model for several ML algorithms, i.e., Naïve Bayes, Naïve Bayes Multinomial, Logistic, Simple Logistic, Decision Tree, and Random Forest.
3. We also apply the feature selection method to find the best set of our features.

3. Proposed Method

All steps carried out in this study are described in Figure 1. Step 1 was adopted from [13], which is an extension of [14]. This technique is called WSD. The aim of Step 1 was to assign a correct sentiment value to the words according to their contextual sense related to different neighboring words since the same words can appear in different parts of a text and may reveal different meanings, depending on the neighboring words. This problem is called polysemy. As shown in Figure 2, polysemy is a word with the same word form (WF) but a different meaning (WS). Some examples of polysemy can be seen in Table 1.

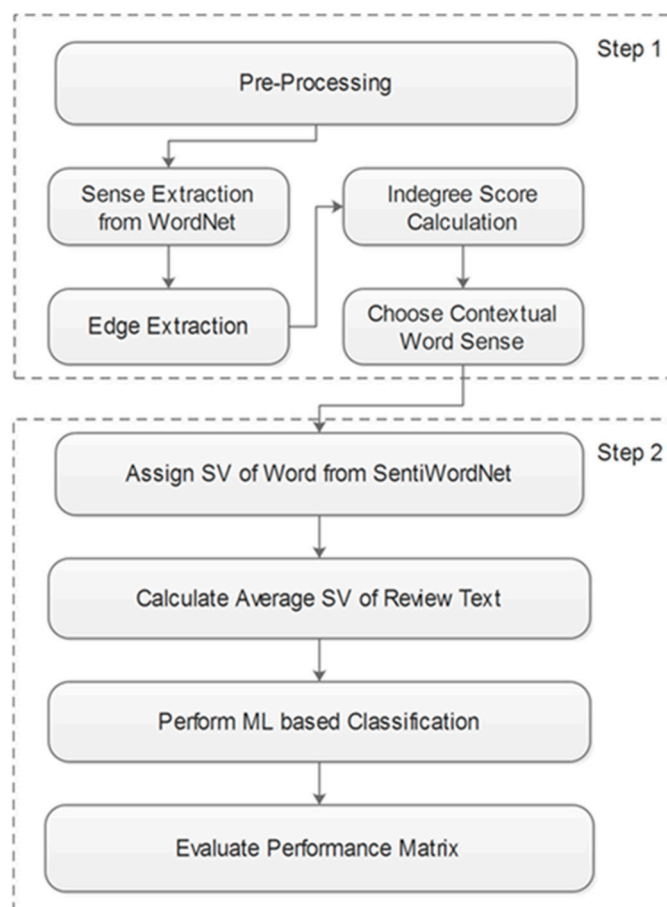


Figure 1. Proposed method for extracting semantic features.

Table 3. Senses and their notations.

Word	Notation	Senses from WordNet	Notation
love	w_1	have a great affection or liking for	ws_1^1
		get pleasure from	ws_1^2
		be enamored or in love with	ws_1^3
screen	w_2	a white or silvered surface where pictures can be projected for viewing	ws_2^1
		a protective covering that keeps things out or hinders sight	ws_2^2
camera	w_3	equipment for taking photographs (usually consisting of a lightproof box with a lens at one end and light-sensitive film at the other)	ws_3^1

In terms of the weighted graph, the senses of the words serve as the vertices of the graph. Adopting [25], the edges are then generated by calculating the similarity between the vertices using WordNet similarity measures from Wu and Palmer (WUP) [26], Leacock and Chodorow (LCH) [27], Resnik (RES) [28], Jiang and Conrath (JCN) [29], and Lin (LIN) [30]. Adapted Lesk [31] was incorporated to improve the result.

Suppose e_{ab}^{cd} is the similarity between w_a^b and w_c^d . All possible similarities between the word senses of the different words are calculated as shown in Table 4. For the implementation of WordNet similarity, the ws4j algorithm from Hideki Shima was adapted. The tool can be downloaded at <https://ws4jdemo.appspot.com/>. To select the contextual sense, the indegree score of each sense was computed using the indegree algorithm. For example, the indegree score of w_1^3 in Table 4, i.e., $In(w_1^3)$, is calculated as follows: $In(w_1^3) = e_{12}^{12} + e_{12}^{22} + e_{12}^{32} + e_{23}^{21}$. In general, the indegree score of ws_a^b is computed using Equation (1). The notation used in Equation (1) is described in Table 5. In Table 4, the similarity highlights with red are the similarities between word senses on the left side of ws_2^2 , and the similarity highlighted with green is the similarity of the word senses on the right side of ws_2^2 . The indegree scores of all ws_i^j are calculated, and the selected (contextual) sense is the sense of the word with the highest indegree score. The contextual sentiment value of a word, i.e., cs_i , is determined using Equation (2), where $f(m_i)$ assigns three sentiment values from SentiWordNet, called $cspos_i$, $csneg_i$, and $csneu_i$. In Equation (3), u is the number of words in the processed review sentence.

Table 4. The calculation of all possible similarities between word senses of different words.

		w_1			w_2		w_3
		ws_1^1	ws_1^2	ws_1^3	ws_2^1	ws_2^2	ws_3^1
w_1	ws_1^1				e_{12}^{11}	e_{12}^{12}	e_{13}^{11}
	ws_1^2				e_{12}^{21}	e_{12}^{22}	e_{13}^{21}
	ws_1^3				e_{12}^{31}	e_{12}^{32}	e_{13}^{31}
w_2	ws_2^1						e_{23}^{11}
	ws_2^2						e_{23}^{21}
w_3	w_3^1						e_{23}^{31}

Table 5. Notations used in Equation (1).

Notations	Definitions
$In(ws_a^b)$	indegree score of ws_a^b
e_{ka}^{lb}	similarity value of word senses in the left side of ws_a^b
o	number of words in the left side of ws_a^b
q_k	number of word senses of word w_k
e_{ab}^{mn}	similarity value of word senses in the right side of ws_a^b
p	number of words in the right side of ws_a^b
r_m	number of word senses of word w_m

$$\ln(ws_a^b) = \sum_{k=1}^o \sum_{l=1}^{q_k} e_{ka}^{lb} + \sum_{m=1}^p \sum_{n=1}^{r_m} e_{am}^{bn} \quad (1)$$

$$cs_i = f(s_i), \quad (2)$$

where:

$$s_i = \max_o \ln(ws_i^t)_{t=1,2,\dots,u}. \quad (3)$$

At the sentence level, three average sentiment values are calculated using Equations (4)–(6), respectively.

$$v_{pos} = \frac{\sum_{i=1}^u cs_{pos_i}}{u}, \quad (4)$$

$$v_{neg} = \frac{\sum_{i=1}^u cs_{neg_i}}{u}, \quad (5)$$

$$v_{neu} = \frac{\sum_{i=1}^u cs_{neu_i}}{u} \quad (6)$$

Regarding the utilized WordNet similarity algorithm, the average value of every contextual sense in the review document was then calculated and assigned as a feature of the review document. Three average sentiment scores from SentiWordNet were assigned to each document review. Hence, a set of 15 contextual features was provided as the basis for the classification task. A detailed description of the features is presented in Table 6.

Table 6. Details of the proposed features.

Feature	Details
F1	Average positive score generated using WSD-WUP
F2	Average negative score generated using WSD-WUP
F3	Average neutral score generated using WSD-WUP
F4	Average positive score generated using WSD-LCH
F5	Average negative score generated using WSD-LCH
F6	Average neutral score generated using WSD-LCH
F7	Average positive score generated using WSD-RES
F8	Average negative score generated using WSD-RES
F9	Average neutral score generated using WSD-RES
F10	Average positive score generated using WSD-LIN
F11	Average negative score generated using WSD-LIN
F12	Average neutral score generated using WSD-LIN
F13	Average positive score generated using WSD-ADT
F14	Average negative score generated using WSD-ADT
F15	Average neutral score generated using WSD-ADT

For assessing the proposed features, an experiment was performed using five ML algorithms, namely Naïve Bayes, Logistic, Simple Logistic, Decision Tree, and Random Forest. We also applied five different feature selection methods, i.e., correlation-based feature selection (CFS), correlation attribute evaluator, information gain attribute evaluator, one rule attribute evaluator and principle component analysis, in order to test the performance of the proposed feature set in various different optimized combinations. For the implementation of the ML algorithms and the attribute selection methods, we used WEKA from the University of Waikato. The toolkit can be found at <https://www.cs.waikato.ac.nz/ml/weka/>. The employed attribute selection methods are briefly overviewed in the following paragraphs.

3.1. Correlation Feature Selection (CFS)

CFS argues that representative features are features that are highly correlated with the class, yet uncorrelated to each other. Therefore, it measures the individual predictive ability of each subset along with the degree of redundancy between them. CFS presents a measure called the ‘merit’ of the feature subsets. It predicts the correlation between a composite test consisting of the summed components and the outside variable using the standardized Pearson’s correlation coefficient [32], as shown in Equation (7).

$$r_{zc} = \frac{k\bar{r}_{zi}}{\sqrt{k + k(k-1)\bar{r}_{ii}}} \quad (7)$$

In Equation (7), r_{zc} is defined as the correlation between the summed components and the outside variable, k is the number of components, \bar{r}_{zi} is the average of the correlation between the components and the outside variable, and \bar{r}_{ii} is the average inter-correlation between the components.

3.2. Correlation Attribute Evaluator

This method calculates the weighted average of the overall Pearson correlation coefficient between an attribute and its class as an indicator for ranking a set of attributes. For $x \in X$ and $c \in C$, where X is the feature subset and C is the class, and Pearson’s correlation coefficient is given by Equation (8).

$$r = \frac{\sum_{i=1}^n (x_i - \bar{x})(c_i - \bar{c})}{\sqrt{\sum_{i=1}^n (x_i - \bar{x})^2} \sqrt{\sum_{i=1}^n (c_i - \bar{c})^2}} \quad (8)$$

3.3. Information Gain Attribute Evaluator

Information gain, also called mutual information, can also reveal dependency between features by calculating the level of impurity in a group of samples. This technique provides a ranking of attributes by evaluating the information gain of an attribute with respect to the class. The information gain of X for C is the class, and X is the attribute subset given by Equation (9).

$$IG(C|X) = H(C) - H(C|X). \quad (9)$$

3.4. OneR Attribute Evaluator

The one rule attribute evaluator rates the values of the attributes based on a simple yet accurate classifier called the one rule classifier [33], which classifies a dataset based on a single attribute, i.e., a one-level decision tree. OneR chooses the rule with the smallest error rate from previously built rules for every attribute in the training data.

3.5. Principle Components

The algorithm attempts to find the axis of greatest variance of the data. In the implementation, this attribute evaluator calculates the eigenvector of the covariance matrix of the data and filters out the attributes with the worst eigenvectors.

4. Result and Discussion

In the experiment, we used three product review datasets from Amazon Review Data provided by Julian McAuley [23], i.e., Beauty, Books, and Movies. The dataset can be downloaded from <http://jmcauley.ucsd.edu/data/amazon/>. For building the ground truth, we assigned a label of three sentiment categories, i.e., positive, negative, and neutral, for every product review document by taking the ‘overall’ score from the metadata of the dataset (see the sample review in Figure 3.). The datasets with an ‘overall’ score of 1–2 were labeled as negative reviews. Meanwhile, the datasets with an ‘overall’ score of 4–5 were labeled as positive. The rest was labeled as neutral.

```

{"reviewerID": "A3G6XNM24ORMWA",
"asin": "7806397051",
"reviewerName": "Karen",
"helpful": [0, 1], "reviewText": "The texture of this concealer
pallet is fantastic, it has great coverage and a wide variety of
uses, I guess it's meant for professional makeup artists and a
lot of the colours are of no use to me but I use at least two of
them on a regular basis, and two more occasionally, which is the
only reason I'm giving it for stars, I feel like the range of
colors is kind of a waste for me, but the product itself is
wonderful, it's not cakey, gives me a natural for and concealed
my imperfections, therefore I highly recommend it :)",
"overall": 4.0,
"summary": "great quality",
"unixReviewTime": 1378425600,
"reviewTime": "09 6, 2013"}

```

Figure 3. Excerpt of the dataset.

We present the results of the experiment using the three Jean McAuley Amazon datasets in Tables 7–9. Our proposed features were evaluated using Naïve Bayes, Naïve Bayes, Logistic, Simple Logistic, J48, and Random Forest. The combination of features was optimized using CFS, correlation attribute evaluator, information gain attribute evaluator, one-rule attribute evaluator, and principle component analysis, and then we compared the results with the full feature set. The performance metrics of the selected features were evaluated using 10-fold cross-validation.

Table 7. Result of experiment using Beauty dataset. FS = Feature Selection; CFS = Correlation Feature Selection; IG = Information Gain; PCA = Principal Component Analysis; Prec = precision; Rec = recall; Fmeas = F-Measure.

FS Method	Algor	Baseline 1			Baseline 2			Proposed Method		
		Prec	Rec	Fmeas	Prec	Rec	Fmeas	Prec	Rec	Fmeas
None	NB	0.768	0.735	0.750	0.737	0.708	0.722	0.817	0.648	0.714
	NBM	0.853	0.853	0.853	0.708	0.708	0.708	0.800	0.855	0.827
	LOG	0.725	0.833	0.775	0.709	0.823	0.762	0.801	0.869	0.834
	SLOG	0.853	0.853	0.853	0.706	0.802	0.751	0.804	0.897	0.848
	DT	0.726	0.843	0.780	0.708	0.813	0.756	0.823	0.869	0.843
	RF	0.807	0.853	0.802	0.769	0.833	0.784	0.847	0.883	0.860
CFS	NB	0.853	0.853	0.853	0.737	0.708	0.722	0.803	0.890	0.844
	NBM	0.768	0.735	0.750	0.736	0.750	0.743	*0.897	*1.000	*0.945
	LOG	0.725	0.833	0.775	0.709	0.823	0.762	*0.897	*1.000	*0.945
	SLOG	0.768	0.735	0.750	0.706	0.802	0.751	0.803	0.890	0.844
	DT	0.853	0.853	0.853	0.708	0.813	0.756	0.803	0.890	0.844
	RF	0.813	0.853	0.815	0.750	0.750	0.750	0.802	0.876	0.837
CORELL	NB	0.768	0.735	0.750	0.737	0.708	0.722	0.815	0.634	0.704
	NBM	0.853	0.853	0.853	0.736	0.750	0.743	0.800	0.862	0.830
	LOG	0.725	0.833	0.775	0.709	0.823	0.762	0.804	0.897	0.848
	SLOG	0.853	0.853	0.853	0.786	0.833	0.797	0.804	0.897	0.848
	DT	0.726	0.843	0.780	0.711	0.833	0.767	0.803	0.890	0.844
	RF	0.807	0.853	0.802	0.769	0.833	0.784	0.800	0.862	0.830
IG	NB	0.768	0.735	0.750	0.737	0.708	0.722	0.809	0.821	0.815
	NBM	0.853	0.853	0.853	0.708	0.708	0.708	0.804	0.897	0.848
	LOG	0.723	0.833	0.775	0.709	0.823	0.762	0.801	0.869	0.834
	SLOG	0.768	0.735	0.750	0.706	0.802	0.751	0.804	0.897	0.848
	DT	0.726	0.843	0.780	0.708	0.813	0.756	0.804	0.897	0.848
	RF	0.807	0.853	0.802	0.769	0.833	0.784	0.802	0.876	0.837

Table 7. Cont.

FS Method	Algor	Baseline 1			Baseline 2			Proposed Method		
		Prec	Rec	Fmeas	Prec	Rec	Fmeas	Prec	Rec	Fmeas
OneR	NB	0.768	0.735	0.750	0.737	0.708	0.722	0.804	0.676	0.730
	NBM	0.853	0.853	0.853	0.736	0.750	0.743	0.804	0.897	0.848
	LOG	0.725	0.833	0.775	0.709	0.823	0.762	0.801	0.869	0.834
	SLOG	0.768	0.735	0.750	0.706	0.802	0.751	0.804	0.897	0.848
	DT	0.726	0.843	0.780	0.708	0.813	0.756	0.803	0.883	0.841
	RF	0.807	0.853	0.802	0.769	0.833	0.784	0.855	0.890	0.864
PCA	NB	0.726	0.843	0.780	0.708	0.813	0.756	0.818	0.855	0.835
	NBM	0.726	0.843	0.780	0.745	0.813	0.771	0.804	0.897	0.848
	LOG	0.725	0.833	0.775	0.711	0.833	0.767	0.801	0.869	0.834
	SLOG	0.781	0.843	0.796	0.754	0.823	0.777	0.804	0.897	0.848
	DT	0.725	0.833	0.775	0.711	0.833	0.767	0.803	0.890	0.844
	RF	0.781	0.843	0.796	0.709	0.823	0.762	0.828	0.876	0.847

Table 8. Result of experiment using Books dataset.

FS Method	Algor	Baseline 1			Baseline 2			Proposed Method		
		Prec	Rec	Fmeas	Prec	Rec	Fmeas	Prec	Rec	Fmeas
None	NB	0.663	0.701	0.679	0.722	0.762	0.741	0.824	0.824	0.824
	NBM	0.737	0.770	0.746	0.722	0.762	0.741	0.829	0.882	0.855
	LOG	0.707	0.747	0.720	0.706	0.667	0.686	0.882	0.882	0.882
	SLOG	0.707	0.770	0.714	0.729	0.810	0.767	0.829	0.882	0.855
	DT	0.607	0.759	0.674	0.706	0.667	0.686	0.826	0.853	0.839
	RF	0.601	0.724	0.657	0.729	0.810	0.767	0.829	0.882	0.855
CFS	NB	0.678	0.747	0.699	0.779	0.714	0.742	0.826	0.853	0.839
	NBM	0.678	0.747	0.699	0.714	0.714	0.714	0.826	0.853	0.839
	LOG	0.707	0.770	0.714	0.722	0.762	0.741	0.829	0.882	0.855
	SLOG	0.707	0.770	0.714	0.722	0.762	0.741	0.821	0.794	0.807
	DT	0.607	0.759	0.674	0.714	0.714	0.714	0.821	0.794	0.807
	RF	0.668	0.736	0.692	0.706	0.667	0.686	0.826	0.853	0.839
CORELL	NB	0.663	0.701	0.679	0.722	0.762	0.741	0.824	0.824	0.824
	NBM	0.737	0.770	0.746	0.729	0.810	0.767	0.829	0.882	0.855
	LOG	0.707	0.747	0.720	0.706	0.667	0.686	0.882	0.882	0.882
	SLOG	0.707	0.770	0.714	0.729	0.810	0.767	0.829	0.882	0.855
	DT	0.607	0.759	0.674	0.714	0.714	0.714	0.821	0.794	0.807
	RF	0.601	0.724	0.657	0.729	0.810	0.767	0.817	0.765	0.790
IG	NB	0.663	0.701	0.679	0.722	0.762	0.741	0.824	0.824	0.824
	NBM	0.737	0.770	0.746	0.722	0.762	0.741	0.829	0.882	0.855
	LOG	0.707	0.747	0.720	0.706	0.667	0.686	0.882	0.882	0.882
	SLOG	0.707	0.770	0.714	0.714	0.714	0.714	0.826	0.853	0.839
	DT	0.607	0.759	0.674	0.706	0.667	0.686	0.824	0.824	0.824
	RF	0.601	0.724	0.657	0.729	0.810	0.767	0.817	0.765	0.790
OneR	NB	0.663	0.701	0.679	0.722	0.762	0.741	0.824	0.824	0.824
	NBM	0.737	0.770	0.746	0.722	0.762	0.741	0.829	0.882	0.855
	LOG	0.707	0.747	0.720	0.706	0.667	0.686	0.882	0.882	0.882
	SLOG	0.707	0.770	0.714	0.714	0.714	0.714	0.826	0.853	0.839
	DT	0.607	0.759	0.674	0.706	0.667	0.686	0.826	0.853	0.839
	RF	0.601	0.724	0.657	0.729	0.810	0.767	0.829	0.882	0.855
PCA	NB	0.710	0.736	0.720	0.722	0.762	0.741	0.829	0.882	0.855
	NBM	0.710	0.736	0.720	0.706	0.667	0.686	0.826	0.853	0.839
	LOG	0.749	0.782	0.754	0.722	0.762	0.741	*0.916	*0.882	*0.895
	SLOG	0.769	0.793	0.729	0.792	0.762	0.776	0.826	0.853	0.839
	DT	0.678	0.747	0.699	0.714	0.714	0.714	0.829	0.882	0.855
	RF	0.705	0.759	0.718	0.729	0.810	0.767	0.824	0.824	0.824

Table 9. Result of experiment using Movies Dataset.


FS Method	Algor	Baseline 1			Baseline 2			Proposed Method		
		Prec	Rec	Fmeas	Prec	Rec	Fmeas	Prec	Rec	Fmeas
None	NB	0.649	0.682	0.664	0.691	0.738	0.708	0.691	0.710	0.700
	NBM	0.739	0.765	0.748	0.743	0.774	0.752	0.746	0.770	0.756
	LOG	0.670	0.718	0.688	0.659	0.714	0.682	0.695	0.750	0.718
	SLOG	0.671	0.741	0.692	0.613	0.762	0.680	0.723	0.800	0.736
	DT	0.660	0.753	0.685	0.683	0.726	0.700	0.723	0.750	0.735
	RF	0.629	0.718	0.664	0.672	0.762	0.698	0.706	0.790	0.730
CFS	NB	0.765	0.788	0.723	0.730	0.786	0.712	0.887	0.920	0.903
	NBM	0.765	0.788	0.723	0.743	0.774	0.752	*0.943	*1.000	*0.970
	LOG	0.720	0.766	0.699	0.615	0.774	0.686	0.888	0.937	0.912
	SLOG	0.720	0.766	0.699	0.615	0.774	0.686	0.943	1.000	0.970
	DT	0.660	0.753	0.685	0.613	0.762	0.680	0.943	1.000	0.970
	RF	0.671	0.741	0.692	0.607	0.726	0.661	0.888	0.931	0.909
CORELL	NB	0.649	0.682	0.664	0.691	0.738	0.708	0.681	0.720	0.699
	NBM	0.739	0.765	0.748	0.743	0.774	0.752	0.695	0.750	0.715
	LOG	0.670	0.718	0.688	0.659	0.714	0.682	0.701	0.760	0.724
	SLOG	0.671	0.741	0.692	0.613	0.762	0.680	0.723	0.800	0.736
	DT	0.660	0.753	0.685	0.683	0.726	0.700	0.695	0.750	0.715
	RF	0.629	0.718	0.664	0.672	0.762	0.698	0.753	0.780	0.763
IG	NB	0.649	0.682	0.664	0.691	0.738	0.708	0.753	0.677	0.710
	NBM	0.739	0.765	0.748	0.743	0.774	0.752	0.680	0.760	0.713
	LOG	0.670	0.718	0.688	0.659	0.714	0.682	0.687	0.770	0.719
	SLOG	0.671	0.741	0.692	0.613	0.762	0.680	0.706	0.790	0.730
	DT	0.660	0.753	0.685	0.683	0.726	0.700	0.675	0.750	0.707
	RF	0.629	0.718	0.664	0.672	0.762	0.698	0.716	0.780	0.737
OneR	NB	0.649	0.682	0.664	0.691	0.738	0.708	0.710	0.750	0.727
	NBM	0.739	0.765	0.748	0.743	0.774	0.752	0.695	0.780	0.725
	LOG	0.670	0.718	0.688	0.659	0.714	0.682	0.695	0.780	0.725
	SLOG	0.671	0.741	0.692	0.613	0.762	0.680	0.756	0.810	0.724
	DT	0.660	0.753	0.685	0.683	0.726	0.700	0.650	0.770	0.705
	RF	0.629	0.718	0.664	0.672	0.762	0.698	0.708	0.770	0.730
PCA	NB	0.691	0.729	0.706	0.733	0.762	0.743	0.723	0.750	0.735
	NBM	0.691	0.729	0.706	0.634	0.619	0.626	0.810	0.810	0.810
	LOG	0.678	0.729	0.696	0.691	0.738	0.708	0.708	0.770	0.730
	SLOG	0.599	0.753	0.667	0.773	0.798	0.736	0.727	0.795	0.820
	DT	0.601	0.765	0.673	0.650	0.738	0.684	0.643	0.730	0.684
	RF	0.713	0.765	0.720	0.696	0.762	0.712	0.884	0.874	0.879

To investigate the role of semantic features in enhancing the result of the supervised SA method, the performance of our proposed features was compared with a baseline feature. For the baseline, we applied Unigram features, i.e., common features used for text classification, extracted using an unsupervised filter from StringtoWordVector in WEKA. In the experiment, we also applied the same feature selection method for the baseline. For the performance metrics, precision, recall, and F-Measure were employed. The whole experiment was conducted using 10-fold cross-validation with WEKA. The results of the experiment are presented in Tables 7–9. We compared the result of experiment with two baseline methods, i.e., Unigram (Baseline 1) and Bigram (Baseline 2), of BoW that are commonly adopted for supervised SA tasks.


In Tables 7–9, we provide the experiment results for the three product review datasets, i.e., Beauty, Books, and Movies dataset. In each table, we compare the performance of the proposed features with two baselines, namely Unigram and Bigram, that are commonly employed for text classification tasks. The results are grouped based on the employed feature selection method. For every feature selection method, we applied all used ML algorithms. To indicate the best performance achieved for precision, recall, and F-Measure, we used the asterisk symbol as presented in the Tables. For the Beauty dataset, the best performance of the proposed features is 0.897, 1.000, and 0.945 for precision, recall, and

F-Measure, respectively. For the Books dataset, Principal Component Analysis (PCA) achieved the best performance by 0.916, 0.882, and 0.895 for precision, recall, and F-Measure, respectively. Meanwhile, for the Movies dataset, features selected using CFS reached the best performance by 0.943, 1.000, and 0.970 for precision, recall, and F-Measure, respectively.


In Figure 4, we calculated the average performance of our proposed features in terms of precision, recall, and F-Measure. Compared with the baseline feature that is commonly employed in the supervised SA task, i.e., BOW, the extracted semantics features have favorably increased all performance metrics of the supervised SA task, i.e., precision, recall, and F-Measure, as indicated in Figure 4. In the figure, we present average evaluation metrics for the three datasets. The figure indicates that the proposed semantic features outperform both Unigram and Bigram in all performance metrics. On average, the proposed features increased precision, recall, and F-Measure by 10.9%, 9.2%, and 10.6% of those compared to baseline methods.

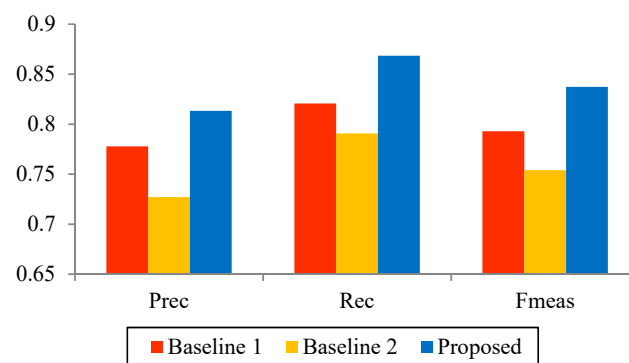

(a) Beauty dataset

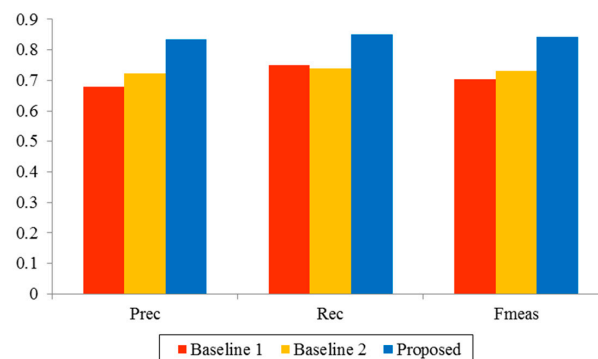

(b) Movies dataset

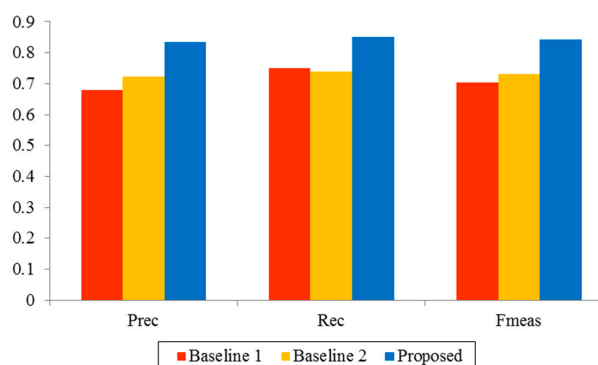

(c) Movie dataset

Figure 4. Average performance of the features compared to the baseline features on three datasets.

To find the best set of the features, we calculated the average performance of our semantic features for every feature selection method, as presented in Figure 5. The results of the experiment presented in Figure 5 confirmed that the best semantic feature set is one that is selected using CFS, i.e., F1–6. Features selected using PCA are in second place. We also highlight that the employed WordNet similarity algorithms have a dominant role in determining the correct sentiment value of a term. Assigning incorrect sentiment values results in extracting contextual features that potentially lead to misclassification.

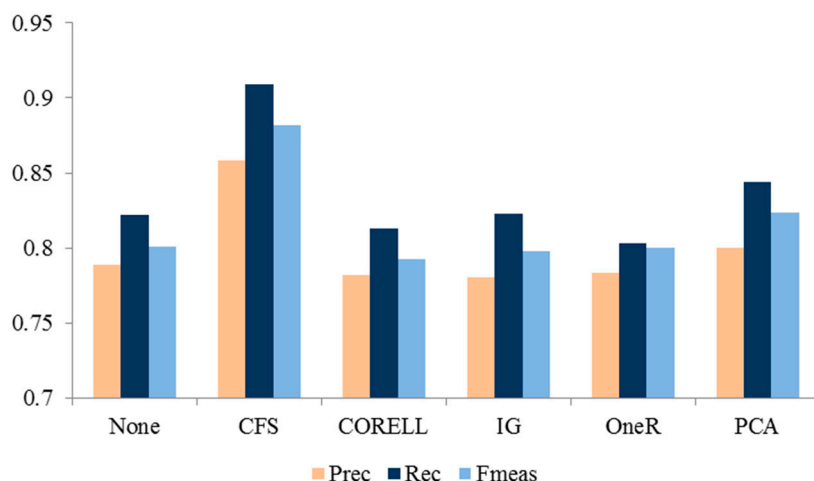


Figure 5. Average performance of semantic features for every feature selection method overall datasets.

The limitation of this study is that the performance of the adopted similarity algorithm is not what was expected. As an example, we calculate semantic similarity of *love#v#1*, *hate#v#1*, and *like#v#1* using *wup*, *jcn*, and *lch*. Naturally, we expected that *love#v#1* and *like#v#1* should have greater semantic similarity than *love#v#1* and *hate#v#1*. Sense of those words can be seen in Table 10. Yet, the result was not what we wished, as indicated in Table 11. In the future, we plan to propose a robust similarity algorithm to augment the result of a supervised SA task.

Table 10. Sense picked from WordNet.

Term	Sense Picked from WordNet Database
<i>love#v#1</i>	have a great affection or liking for
<i>hate#v#1</i>	dislike intensely
<i>like#v#1</i>	Prefer or wish to do something

Table 11. Result of semantic similarity.

WordNet Similarity Algorithm	Semantic Similarity of	
	<i>Love#v#1</i> and <i>Hate#v#1</i>	<i>Love#v#1</i> and <i>Like#v#1</i>
<i>wup</i>	0.04	0.04
<i>jcn</i>	0.06	0.07
<i>lch</i>	1.95	1.94

Implications

The implications comprise practical implication for both online marketers and customers, as well as academic implications for the researcher in the field of text processing. The results of study affirm that our proposed SA technique can be employed to generate quantitative ratings from unstructured text data within the product review [34]. The online marketers could, therefore, apply the technique to foresee consumer satisfaction toward a certain product [35]. Meanwhile, for potential customers, a

big data recommender system could possibly be built accordingly to provide recommendation about the intended product they want to purchase [2]. The finding of this work could also be beneficial for researchers in the field of text processing to further explore more sophisticated semantic features of words. Previous work has also confirmed the robustness of semantic features [10].

5. Conclusions

This paper proposed a set of contextual features for SA of product reviews, generated using an extended WSD method. Several ML algorithms were employed to evaluate the performance of the proposed features in a supervised SA task. To find the subset that provides the best performance metrics, several feature selection methods were applied, i.e., CFS, correlation attribute evaluator, information gain attribute evaluator, one-rule attribute evaluator, and principle component analysis.

This study contributes to improving the performance of supervised SA tasks by proposing a method to extract semantic features of the product review dataset. The results of the cross-validated experiment in a supervised environment using several ML algorithms and feature selection methods has confirmed that our proposed semantic features favorably augment the performance of SA in terms of precision, recall, and F-Measure. Another finding of this study summarizes the robustness of semantic feature set selected using CFS and PCA.

Author Contributions: Methodology, B.S.R.; Software, B.S.R.; Writing-original draft preparation, B.S.R.; Formal analysis, R.S.; Formal analysis, C.F.; Writing-review and editing, C.F.; Supervision, R.S.; Supervision, C.F.

Funding: This research received no external funding.

Acknowledgments: We would like to thank both Institut Teknologi Sepuluh Nopember Surabaya and Universitas Muhammadiyah Jember for providing the laboratory for running the experiment.

Conflicts of Interest: The authors declare that there is no conflict of interest regarding publication of this paper.

References

1. Missen, M.M.S.; Coustaty, M.; Choi, G.S.; Alotaibi, F.S.; Akhtar, N.; Jhandir, M.Z.; Prasath, V.B.S.; Salamat, N.; Husnain, M. OpinionML-Opinion Markup Language for Sentiment Representation. *Symmetry* **2019**, *11*, 545. [[CrossRef](#)]
2. Hsieh, W.T.M. eWOM persuasiveness: Do eWOM platforms and product type matter? *Electron. Commer. Res.* **2015**, *15*, 509–541.
3. Zhang, H.; Rao, H.; Feng, J. Product innovation based on online review data mining: A case study of Huawei phones. *Electron. Commer. Res.* **2018**, *18*, 3–22. [[CrossRef](#)]
4. Saura, J.R.; Bennett, D. A Three-Stage method for Data Text Mining: Using UGC in Business Intelligence Analysis. *Symmetry* **2019**, *11*, 519. [[CrossRef](#)]
5. Saura, J.R.; Herráez, B.R.; Reyes-Menendez, A.N.A. Comparing a Traditional Approach for Financial Brand Communication Analysis with a Big Data Analytics Technique. *IEEE Access* **2019**, *7*, 37100–37108. [[CrossRef](#)]
6. Zheng, L.; Wang, H.; Gao, S. Sentimental feature selection for sentiment analysis of Chinese online reviews. *Int. J. Mach. Learn. Cybern.* **2018**, *9*, 75–84. [[CrossRef](#)]
7. Li, X.; Wu, C.; Mai, F. The effect of online reviews on product sales: A joint sentiment-topic analysis. *Inf. Manag.* **2018**, *56*, 172–184. [[CrossRef](#)]
8. Medhat, W.; Hassan, A.; Korashy, H. Sentiment analysis algorithms and applications: A survey. *Ain Shams Eng. J.* **2014**, *5*, 1093–1113. [[CrossRef](#)]
9. Passalis, N.; Tefas, A. Learning bag-of-emb e dded words representations for textual information retrieval. *Pattern Recognit.* **2018**, *81*, 254–267. [[CrossRef](#)]
10. Rintyarna, B.S.; Sarno, R.; Fatichah, C. Enhancing the performance of sentiment analysis task on product reviews by handling both local and global context. *Int. J. Inf. Decis. Sci.* **2018**, *11*, 1–27.
11. Saif, H.; He, Y.; Fernandez, M.; Alani, H. Contextual semantics for sentiment analysis of Twitter. *Inf. Process. Manag.* **2016**, *52*, 5–19. [[CrossRef](#)]

12. Baccianella, S.; Sebastiani, F.; Esuli, A. SentiwordNet 3.0: An Enhanced Lexical Resource for Sentiment Analysis and Opinion Mining. In Proceedings of the 9th Language Resources and Evaluation, Valletta, Malta, 17–23 May 2010; pp. 2200–2204.
13. Wilson, P.H.T.; Wiebe, J. Recognizing Contextual Polarity in Phrase-Level Sentiment Analysis. In Proceedings of the Conference Human Language Technology and Empirical Methods in Natural Language Processing, Vancouver, BC, Canada, 6–8 October 2005; pp. 347–354.
14. Thelwall, A.K.M.; Buckley, K.; Paltoglou, G.; Cai, D. Sentiment Strength Detection in Short Informal Text. *J. Am. Soc. Inf. Sci. Technol.* **2010**, *61*, 2544–2558. [[CrossRef](#)]
15. Hall, M.; Frank, E.; Holmes, G.; Pfahringer, B.; Reutemann, P.; Witten, I.H. The WEKA Data Mining Software: An Update. *ACM SIGKDD Explor. Newslett.* **2009**, *11*, 10–18. [[CrossRef](#)]
16. Xia, H.; Yang, Y.; Pan, X.; Zhang, Z.; An, W. Download citationRequest full-textSentiment analysis for online reviews using conditional random fields and support vector machines. *Electron. Commer. Res.* **2019**, 1–18. [[CrossRef](#)]
17. Khan, F.H.; Qamar, U.; Bashir, S. SentiMI: Introducing point-wise mutual information with SentiWordNet to improve sentiment polarity detection. *Appl. Soft Comput. J.* **2016**, *39*, 140–153. [[CrossRef](#)]
18. Al Amrani, Y.; Lazaar, M.; El Kadiri, K.E. Random Forest and Support Vector Machine based Hybrid Approach to Sentiment Analysis. *Procedia Comput. Sci.* **2018**, *127*, 511–520. [[CrossRef](#)]
19. Singh, J.; Singh, G.; Singh, R. Optimization of sentiment analysis using machine learning classifiers. *Hum.-Centric Comput. Inf. Sci.* **2017**, *7*, 32. [[CrossRef](#)]
20. Mukherjee, S.; Bhattacharyya, P. LNCS 7181-Feature Specific Sentiment Analysis for Product Reviews. In *Computational Linguistics and Intelligent Text Processing, Proceedings of the 13th International Conference, New Delhi, India, 11–17 March 2012*; Springer: Berlin, Germany, 2012; pp. 475–487.
21. Lakkaraju, H.; Bhattacharyya, C.; Bhattacharya, I.; Merugu, S. Exploiting Coherence for the Simultaneous Discovery of Latent Facets and associated Sentiments. In Proceedings of the Eleventh SIAM: International Conference on Data Mining, Mesa, AZ, USA, 28–30 April 2011; pp. 498–509.
22. Zhang, L.; Liu, B. Aspect and entity extraction for opinion mining. In *Data Mining and Knowledge Discovery for Big*; Springer: Berlin, Germany, 2014; pp. 1–40.
23. Muhammad, A.; Wiratunga, N.; Lothian, R. Contextual sentiment analysis for social media genres. *Knowl.-Based Syst.* **2016**, *108*, 92–101. [[CrossRef](#)]
24. Suryani, A.A.; Arieshanti, I.; Yohanes, B.W.; Subair, M.; Budiwati, S.D.; Rintyarna, B.S. Enriching English Into Sundanese and Javanese Translation List Using Pivot Language. In Proceedings of the 2016 International Conference on Information, Communication Technology and System, Surabaya, Indonesia, 12 October 2016; pp. 167–171.
25. Sinha, R.; Mihalcea, R. Unsupervised Graph-based Word Sense Disambiguation Using Measures of Word Semantic Similarity. In Proceedings of the 2007 1st IEEE International Conference on Semantic Computing (ICSC), Irvine, CA, USA, 17–19 September 2007; pp. 363–369.
26. Wu, Z.; Palmer, M. Verb semantics and Lexical selection. In Proceedings of the 32nd Annual Meeting on Association for Computational Linguistics, Las Cruces, New Mexico, 27–30 June 1994; pp. 133–138.
27. Leacock, C.; Miller, G.A.; Chodorow, M. Using corpus statistics and WordNet relations for sense identification. *Comput. Linguist.* **1998**, *24*, 147–165.
28. Resnik, P. Using Information Content to Evaluate Semantic Similarity in a Taxonomy. In Proceedings of the 14th International Joint Conference on Artificial Intelligence (IJCAI'95), Montreal, QC, Canada, 20–25 August 1995; Volume 1, pp. 448–453.
29. Jiang, J.J.; Conrath, D.W. Semantic Similarity Based on Corpus Statistics and Lexical Taxonomy. In Proceedings of the 10th Research on Computational Linguistics International Conference, Taipei, Taiwan, 22–24 August 1997; pp. 19–33.
30. Lin, D. An Information-Theoretic Definition of Similarity. In Proceedings of the Fifteenth International Conference on Machine Learning, San Francisco, CA, USA, 24–27 July 1998; pp. 296–304.
31. Banerjee, S.; Pedersen, T. An Adapted Lesk Algorithm for Word Sense Disambiguation Using WordNet. In *Computational Linguistics and Intelligent Text Processing, Proceedings of the Third International Conference, CILing 2002, Mexico City, Mexico, 17–23 February 2002*; Springer: Berlin, Germany, 2002; Volume 2276, pp. 136–145.

32. Hall, M. Correlation-based Feature Selection for Machine Learning. Ph.D. Thesis, The University of Waikato, Hamilton, New Zealand, April 1999. Available online: <https://www.cs.waikato.ac.nz/~mhall/thesis.pdf> (accessed on 17 July 2019).
33. Holte, R.C. Very Simple Classification Rules Perform Well on Most Commonly Used Datasets. *Mach. Learn.* **1993**, *11*, 63–91. [[CrossRef](#)]
34. López, R.R.; Sánchez, S.; Sicilia, M.A. Evaluating hotels rating prediction based on sentiment analysis services. *Aslib J. Inf. Manag.* **2015**, *67*, 392–407. [[CrossRef](#)]
35. Tsao, H.; Chen, M.Y.; Lin, H.C.K.; Ma, Y.C. The asymmetric effect of review valence on numerical rating A viewpoint from a sentiment analysis of users of TripAdvisor. *Online Inf. Rev.* **2019**, *43*, 283–300. [[CrossRef](#)]



© 2019 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).